

Backyard Echo Heights Playhouse

Model # 2102316

Owner's Manual & Assembly Instructions

MANUFACTURED BY: Backyard Discovery 3305 Airport Drive Pittsburg, KS 66762 800-856-4445



WARNING

Adult Assembly Required. Not suitable for children under two years, due to sharp points and small parts. Only for domestic use.

"The play house is intended for indoor or outdoor use"





INSTALLATION **SERVICES AVAILABLE!***

Need a helping hand? Let our team of professionals handle the installation for you!

> GOCONFIGURE 888-888-5424

*Installation services are only available to U.S. customers.

average 2 person assembly time



assembly time may vary based on skill level

Before you begin FOR QUICK & EASY ASSEMBLY FIND 3D INSTRUCTIONS FOR THIS PRODUCT IN DOWNLOAD THE FREE APP Google Play

For the most up to date assembly manual, to register your set, or to order replacement parts please visit www.backyarddiscovery.com

SAVE THIS ASSEMBLY MANUAL FOR FUTURE REFERENCE IN THE EVENT THAT YOU NEED TO ORDER REPLACEMENT PARTS.

Para obtener instrucciones en español, visite www.backyarddiscovery.com • Pour des instructions en français, visitez www.backyarddiscovery.com



INSTALLATION SERVICES AVAILABLE!*

Need a helping hand?

Let our team of professionals handle the installation for you!

GOCONFIGURE 888-888-5424

*Installation services are only available to U.S. customers.

With Go Con! gure, we bring you 18 years of experience right to your doorstep. We service a wide array of indoor and outdoor recreation products that most consumers don't have the time or ability to deliver & install themselves.

We do the heavy lifting, so you don't have to!

- 18+ Years of Experience Servicing Big Box Retailers and Direct Consumers
- Highly Skilled, Specialized, Courteous, Professional Service Technicians
- Over 140,000 Installations Annually
- White Glove Service

- Satisfaction Guarantee
- Flexible Appointments, including weekends
- Coverage across the nation

Visit www.goconfigure.com for more info!

*Installation services are only available to U.S. customers.





The store where you made your purchase does not stock parts for this item.

If you have assembly questions or you are missing or have damaged parts, please call

1-800-856-4445

you can also visit www.backyarddiscovery.com or e-mail customerservice@backyarddiscovery.com

Please have the following information ready when you make your call:

- Model Number of the product located on the front of the assembly manual
- The item description and number from the parts list from the manual that was included in your box
- Read entire assembly manual, paying special attention to the important tips and safety information.
- Ensure there are no missing pieces by first separating and identifying all parts.
- Make sure to check packing material for small parts that may have fallen out during shipment.
- Structures are not intended for public use. Any unintended use such as home child care, daycare center, faith center, government facility, home owner's associate, park or school will make the warranty of our product null & void.
- This manual contains helpful information concerning assembly preparation, installation procedure and required maintenance.
- Always keep safety in mind as your structure is being built.
- Keep these instructions for future reference.



Limited Warranty


Please read entire booklet completely before beginning the assembly process

Please retain these instructions and your receipt for future reference. Keep them in a safe place where you can refer to them as needed. In order to provide you with the most efficient service, it is required that you provide us with the part numbers when ordering parts.

For Your Records:

Please take time and fill out the information below. This information will be needed for warranty issues.

Where Purchased:	
Date of Purchase:	
Installation Date:	
Installed by:	
Tracking Number:	

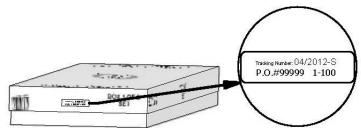

Tracking Number Reference Label

Tracking ID number on the carton and on the bottom of the vertical ID plate are included for tracking purposes associated with warranty claims.

This Limited Warranty by Backyard Discovery applies to products manufactured under the Backyard Discovery brand or its other brands including but not limited to Backyard Botanical, Adventure Playsets, and Leisure Time Products.

Backyard Discovery warrants that this product is free from defect in materials and workmanship for a period of one (1) year from the original date of purchase. This one (1) year warranty covers all parts including wood, hardware, and accessories. All wood carries a! ve (5) year pro-rated warranty against rot and decay. Refer to the schedule below for charges associated with replacement of parts under this Limited Warranty. In addition, Backyard Discovery will replace any parts within the! rst 30 days from date of purchase found to be missing from or damaged in the original packaging.

This warranty applies to the original owner and registrant and is non-transferable. Regular maintenance is required to assure maximum life and performance of this product. Failure by the owner to maintain the product according to the maintenance requirements may void this warranty. Maintenance guidelines are provided in the Owner's Manual.

This Limited Warranty does not cover:

- Installation
- · Labor for any inspection
- Labor for replacement of any defective item(s)
- · Incidental or consequential damages
- · Cosmetic defects which do not affect performance or integrity of a part or the entire product
- · Vandalism, improper use, failure due to loading or use beyond the capacities stated in the applicable Assembly Manual.
- Acts of nature including but not limited to wind, storms, hail, floods, excessive water exposure
- Improper installation including but not limited to installation on uneven, unlevel, or soft ground

Product Age

· Minor twisting, warping, checking, or any other natural occurring properties of wood that do not affect performance or integrity

Backyard Discovery products have been designed for safety and quality. Any modifications made to the original product could damage the structural integrity of the unit leading to failure and possible injury. Modification voids any and all warranties and Backyard Discovery assumes no liability for any modified products or consequences resulting from failure of a modified product.

This product is warranted for RESIDENTIAL USE ONLY. Any unintended use such as home child care, daycare center, faith center, government facility, home owner's associate, park or school will make the warranty of our product null & void.

Pro Rated Part Replacement Schedule

Customer Pays

All Parts	
0-30 days from date of purchase	\$0 and free shipping
31 days to 1 year	\$0 + S&H
Wood Rot and Decay Only	
1 year	\$0 and free shipping
2 year	20% + S&H
3 year	40% + S&H
4 year	60% + S&H
5 year	80% + S&H
Over 5 years	100% + S&H



Operating Instructions and Safety Warnings



NOTE:

Your Children's Safety Is Our #1 Concern!

Observe the following statements and warnings to reduce the likelihood of serious or fatal injury. Please review these safety rules regularly with your children.



WARNING: BURN HAZARD

- Pay special attention to plastic and metal surfaces as they may be hot enough to cause burns.
- Always check the temperature of the product before letting your children play on it.
- Remember that the product may cause burns if left in direct sunlight.
- Always be aware of the sun and weather conditions, and do not assume that the equipment is safe because the air temperature is not very high.

- Equipment is recommended for use by children 2 to 10 years of age.
- On-site adult supervision is required.
- Instruct children not to climb when the equipment is wet.
- Instruct children to never crawl on top of a play house roof.
- The parents should have the children dress appropriately with well-fitting shoes.
 Loose clothing such as scarves and ponchos should not be worn. Always take off, tie up or tuck in cords and drawstrings on children's clothing. These things can get caught on playground equipment and strangle a child.
- Do not allow children to walk, in front, between, behind or close to moving rides.

- Instruct children not to attach items to the equipment that are not specifically designed for use with that equipment (such as ropes, clothesline, pet leashes, etc.).
- Instruct children to remove their bike or other sports helmet before playing on the playground equipment.
- Do not allow children to go down slide head first or run up slide.
- Instruct children to look before they slide to make sure no one is at the bottom.
- On sunny and/or hot days, check the slide and other plastic rides to assure that they are not hot to the touch to cause burns. Cool hot slide and rides with water and wipe dry prior to using.
- Children must wear shoes when using the set. Do not allow children to wear open toe or heel footwear like sandals, flip-flops or clogs



Positioning Your Playhouse

- The playhouse is designed to be installed on a level surface by an Adult with an Adult helper.
 Place in a fl at area of your yard to minimize ground preparation.
- Choose a level location for the equipment. This can reduce the likelihood of the playhouse tipping over and loose-fi ll surfacing material washing away during heavy rains.
- Place the equipment not less than 6'-7" (2.0 m) from any structure or obstruction such as a fence, garage, house, overhanging branches, laundry lines, or electrical wires.
- It is a good idea to place your playhouse in an area that is convenient for adults to watch children at play.
- Create a site free of obstacles that could cause injuries – such as low overhanging tree branches, overhead wires, tree stumps and/or roots, large rocks, bricks and concrete. We have additional suggestions in the Suggested Playground Surfacing Section.
- Do not build your playhouse on top of surfacing material.

Suggested Playground Surfacing

- Do not install home playground equipment over concrete, asphalt, packed earth, grass, carpet, or any other hard surface. A fall onto a hard surface can result in serious injury to the equipment user.
- Do not install loose fill surfacing over hard surfaces such as concrete or asphalt.
- Shredded bark mulch, wood chips, fine sand and fine gravel, are added as shock absorbing materials after assembly. If used properly these materials can absorb some of the impact of a child's fall.
- All surface material should extend a minimum of 6 feet in all directions around the play area.
- Do not apply playground surfacing until after the unit is completely constructed. Play house should not be built on top of surfacing.
- Use containment, such as digging out around the perimeter and/or lining the perimeter with landscape edging.
- Installations of rubber tiles or poured-inplace surfaces (other than loose-fill materials) generally require a professional and are not "doit-yourself" projects.
- Shall use Playground Surfacing Materials (other than loose-fill material) which comply with the safety standard ASTM F1292 Standard Specification of Impact Attenuation of Surfacing Materials within the Use Zone of Playground Equipment.

The following chart explains the fall height in feet from which a life threatening head injury would not be expected Critical Heights in feet (m) of Tested Materials

Material	U	Compressed Depth		
	6" (152mm)	9" (228mm)	12" (304mm)	to 9" (228mm)
Wood Chips	7' (2.13m)	10-12' (3.0-3.6m)	11' (3.35m)	10' (3.05m)
Double-Shredded Bark Mulch	6' (1.83m)	10-12' (3.0-3.6m)	11' (3.35m)	7' (2.13m)
Engineered Wood Fibers	6' (1.83m)	7' (2.13m)	>12' (3.66m)	6' (1.83m)
Fine Sand	5' (1.52m)	5' (1.52m)	9' (2.74m)	5' (1.52m)
Coarse Sand	5' (1.52m)	5' (1.52m)	6' (1.83m)	4' (1.22m)
Fine Gravel	5' (1.52m)	7' (2.13m)	10' (3.05m)	6' (1.83m)
Medium Gravel	5' (1.52m)	5' (1.52m)	6' (1.83m)	5' (1.52m)
Shredded Tires*	10-12' (3.0-3.6m)	N/A	N/A	N/A

^{*}This data is from tests conducted by independent testing laboratories on a 6-inch depth of uncompressed shredded tire samples produced by four manufacturers. The tests reported critical heights, which varied from 10 feet to greater than 12 feet. It is recommended that persons seeking to install shredded tires as a protective surface request test data from the supplier showing the critical height of the material when it was tested in accordance with ASTM F1292.



APPENDIX A

The following information is from the United States ConsumerProductSafetyCommission'sInformation Sheet for playground surfacing material; also see the following website for additional information: www.cpsc.gov

X3. SECTION 4 OF THE CONSUMER PRODUCT SAFETY COMMISSION'S OUTDOOR HOME PLAYGROUND SAFETY HANDBOOK⁹

X3.1 Select Protective Surfacing—One of the most important things you can do to reduce the likelihood of serious head injuries is to install shock-absorbing protective surfacing under and around your play equipment. The protective surfacing should be applied to a depth that is suitable for the equipment height in accordance with ASTM Specification F 1292. There are different types of surfacing to choose from; whichever product you select, follow these quidelines:

X3.1.1 Loose-Fill Materials:

X3.1.1.1 Maintain a minimum depth of 9 inches of loose! Il materials such as wood mulch/chips, engineered wood! ber (EWF), or shredded/recycled rubber mulch for equipment up to 8 feet high; and 9 inches of sand or pea gravel for equipment up to 5 feet high. NOTE: An initial! Il level of 12 inches will compress to about a 9-inch depth of surfacing overtime. The surfacing will also compact, displace, and settle, and should be periodically refilled to maintain at least a 9-inch depth.

X3.1.2 Use a minimum of 6 inches of protective surfacing for play equipment less than 4 feet in height. If maintained properly, this should be adequate. (At depths less than 6 inches, the protective material is too easily displaced or compacted.)

NOTE: Do not install home playground equipment over concrete, asphalt, or any other hard surface. A fall onto a hard surface can result in serious injury to the equipment user. Grass and dirt are not considered protective surfacing because wear and environmental factors can reduce their shock absorbing effectiveness. Carpeting and thin mats are generally not adequate protective surfacing. Ground level equipment such as a sandbox, activity wall, playhouse or other equipment that has no elevated play surface – does not need any protective surfacing.

X3.1.3 Use containment, such as digging out around the perimeter and/or lining the perimeter with landscape edging. Don't forget to account for water drainage.

X3.1.3.1 Check and maintain the depth of the loose-! Il surfacing material. To maintain the right amount of loose-fill materials, mark the correct level on play equipment support posts. That way you can easily see when to replenish and/or redistribute the surfacing.

X3.1.3.2 Do not install loose-fill surfacing over hard surfaces such as concrete or asphalt.

X3.1.4 Poured-In-Place Surfaces or Pre-Manufactured Rubber Tiles — You may be interested in using surfacing other than loose-fill materials – like rubber tiles or poured-in-place surfaces.

X3.1.4.1 Installations of these surfaces generally require a professional and are not "do-it-yourself" projects.

X3.1.4.2 Review surface specification before purchasing this type of surfacing. Ask the installer/manufacturer for a report showing that the product has been tested to the following safety standard: ASTM F 1292 Standard Specification for Impact Attenuation of Surfacing Materials within the Use Zone of Playground Equipment. This report should show the specific height for which the surface is intended to protect against serious head injury. This height should be equal to or greater than the fall height – vertical distance between a designated play surface (elevated surface for standing, sitting, or climbing) and the protective surfacing below – of your play equipment

X3.1.4.3 Check the protective surfacing frequently for wear.

X3.1.5 Placement — Proper placement and maintenance of protective surfacing is essential. Be sure to:

X3.1.5.1 Extend surfacing at least 6 feet from the equipment in all directions.

X3.1.5.2 For to-fro swings, extend protective surfacing in front of and behind the swing to a distance equal to twice the height of the top bar from which the swing is suspended.

⁹This information has been extracted from the CPSC publications "Playground Surfacing — Technical Information Guide" and "Handbook for Public Playground Safety." Copies of these reports can be obtained by sending a postcard to the: O\$ ce of Public A" airs, U.S. Consumer Product Safety Commission, Washington, D.C., 20207 or call the toll-free hotline: 1-800-638-2772.

The American Society for Testing and Materials takes no position respecting the validity of any parent right asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such parent rights, and the risk of infringement of such rights, are entirely their own responsibility.

The standard is subject to revision at any time by the responsible technical committee and must be reviewed every! ve years and if not revised, either approved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards. 100 Barr Harbor Drive, West Conshohocken, PA 19428.



IT IS IMPORTANT TO CHECK AND TIGHTEN ALL HARDWARE AT THE BEGINNING AND DURING THE SEASON AS THEY MAY LOOSEN DUE TO WOOD EXPANSION AND CONTRACTION.

At the beginning of each play season

- Tighten all hardware.
- Lubricate all metallic moving parts per manufacturer's instructions.
- Check all protective coverings on bolts, pipes, edges, and corners. Replace if they are loose, cracked, or missing.
- Check all moving parts including swing seats, ropes, cables, and chains for wear, rust, or other deterioration. Replace as needed.
- Check metal parts for rust. If found, sand and repaint using a non lead-based paint meeting the requirements of 16 CFR 1303.
- Check all wood members for deterioration and splinters. Sand down splinters and replace deteriorating wood members.
- Reinstall any plastic parts, such as swing seats or any other items that were removed for the cold season.
- Rake and check depth of loose fill protective surfacing materials to prevent compaction and to maintain appropriate depth. Replace as necessary.

Twice a month during play season

- Tighten all hardware.
- Check all protective coverings on bolts, pipes, edges, & corners. Replace if they are loose, cracked, or missing.
- Rake and check depth of loose fill protective surfacing materials to prevent compaction and to maintain appropriate depth. Replace as necessary.

Once a month during play season.

- Lubricate all metallic moving parts per manufacturer's instructions.
- Check all moving parts including swing seats, ropes, cables, and chains for wear, rust, or other deterioration. Replace as needed.

At the end of each play season or when the temperature drops below 32° F

- Remove plastic swing seats and other items as specil ed by the manufacturer and take indoors or do not use.
- Rake and check depth of loose fill protective surfacing materials to prevent compaction and to maintain appropriate depth. Replace as necessary.

Additional Maintenance

- Check the swing beam and hardware every two weeks due to wood expansion and contraction.
 It is particularly important that this procedure be followed at the beginning of each season.
- Inspect wood parts monthly. The grain of the wood sometimes will lift in the dry season causing splinters to appear. Light sand may be necessary to maintain a safe playing environment. Treat your playset with stain regularly, to help prevent severe checking/ splitting and other weather damage.
- A waterborne transparent stain has been applied to your playset. This is done for color only. Once or twice a year, depending on your climate conditions, you must apply some type of protection (sealant) to the wood of your unit. Prior to the application of sealant, lightly sand any "rough" spots on your playset. Please note this is a requirement of your warranty.
- Assembling and maintaining the playset on a level location is very important. As your children play, your playset will slowly dig its way into the soil, and it is very important that it settles evenly. Make sure the playset is level and true one each year or at the beginning of each play season.

Disposal Instructions

When the Playcenter use is no longer desired, it should be disassembled and disposed of in such a way that no unreasonable hazards will exist at the time the unit is discarded.



Third Party Assembly

- Customer may, in their sole discretion, elect to use a third party person or service to assemble this product. Backyard Discovery assumes no responsibility or liability for any charge incurred by the Customer for any assembly services'. Please see our warranty for more information about damaged and missing part replacement coverage. Backyard Discovery will not reimburse Customer for the price of parts purchased
- Modifications made by the consumer to the original activity toy shall be carried out according to the instructions of the manufacturer. In particular, instructions shall be provided with kit/accessory about the installation of rope/nets concerning the minimum diameter, the need for fixation ends, overall length, and positioning in relation to other at both structures.

OWNERS SHALL BE RESPONSIBLE FOR MAINTAINING THE LEGIBILITY OF THE WARNING LABELS



Your Backyard Discovery structure is designed and constructed of quality materials. As with all outdoor products it will weather and wear. To maximize the enjoyment, safety and life of your structure it is important that you properly maintain it.

About Our Wood

Backyard Discovery uses 100% Cedar (C. Lanceolata) wood. Although we take great care in selecting the best quality lumber available, wood is still a product of nature and susceptible to weathering which can change the appearance of your set.

What causes weathering? Does it affect the strength of my product?

One of the main reasons for weathering is the effects of water (moisture); the moisture content of the wood at the surface is different than the interior of the wood. As the climate changes, moisture moves in or out of the wood, causing tension which can result in checking and or warping. You can expect the following due to weathering. These changes will not affect the strength of the product:


- **1. Checking** is surface cracks in the wood along the grain. A post (4" x 4") will experience more checking than a board (1" x 4") because the surface and interior moisture content will vary more widely than in thinner wood.
- **2. Warping** results from any distortion (twisting, cupping) from the original plane of the board and often happens from rapid wetting and drying of the wood.
- **3. Fading** happens as a natural change in the wood color as it is exposed to sun-light and will turn grey over time.

How can I reduce the amount of weathering to wood product?


- 1. Your wood product is coated with a water-based stain. Sunlight will break down the coating, so we recommend applying a water repellent or stain on a yearly basis (see your local stain and paint supplier for a recommended product). You must apply some type of protection (sealant) to the wood of your product. Please note this is a requirement of your warranty. Most weathering is just the normal result of nature and will not affect safety. However if you are concerned that a part has experienced a severe weathering problem please call our customer service department for further assistance.
- 2. Inspect wood parts monthly. The grain of the wood sometimes will lift in the dry season causing splinters to appear. Light sanding may be necessary to maintain a safe environment. Treating your Product with protection (sealant) after sanding will help prevent severe checking/splitting and other weather damage.



Protrusion Hazard




If you see exposed threads and your bolt protrudes beyond the T-Nut you may have over tightened the bolt or used incorrect hardware. If you've overtightened, remove the bolt and add washers to eliminate the protrusion.

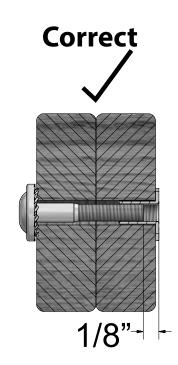

Proper Hardware Assembly


Bolt and T-Nut Assembly

Tap T-nut into the provided hole. Insert your bolt through the lock washer and insert into the provided hole opposite from the T-Nut. Turn clockwise to thread into T-nut. Do not completely tighten until instructed.



Bolt and Barrel Nut Assembly

Insert barrel nut through the lock washer and press the pair through the provided hole. Insert your bolt through the second lock washer and insert the pair into the provided hole opposite from the barrel nut. Turn clockwise to thread into the barrel nut. Do not completely tighten until instructed.



Lag Assembly

Normally there will be a pre-drilled pilot hole on assemblies that require a Lag Screw. If there is no pilot hole, line up the two boards as they are to be attached and use the factory drilled hole as a guide to drill another pilot hole into the adjoining board. This will keep the wood from splitting. Only a lock washer is required for steps with Lag Screws.







ASSEMBLY TIP:


Keep and eye out for these boxes which will contain helpful pictures and information making the assembly process as quick and painless as possible.



When removing the wood from the boxes we recommend arranging them by part number before you begin assembly. This will allow for faster assembly and easily identify any parts that may be missing or damaged.


NUT BARREL SCREW T-NUT WASHER FLAT BOLT HEX BOLT SCREW PWH H100545 H100699 H100706 H100716 H100718 H100742


Sorting Hardware



Hardware bags are printed with a seven digit alpha-numeric part number. During assembly you only need to reference the last three digits of the part number as noted in each step. This will make finding the correct hardware easier.

Hardware Identification







Note:


This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- --Reorient or relocate the receiving antenna.
- --Increase the separation between the equipment and receiver.
- --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- --Consult the dealer or an experienced radio/TV technician for help Caution: Changes or modifications not expressly approved by the party responsible for



Owner's Manual

Tools Required for Installation

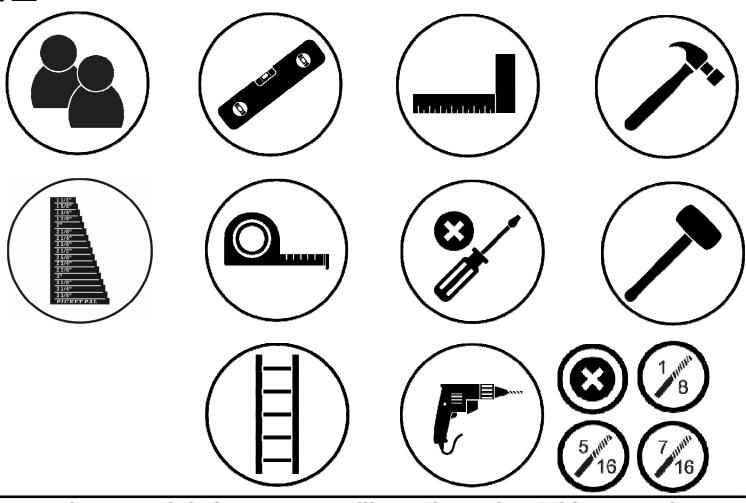

Icons and their uses you will see throughout this manual



You will need to make sure that your assembly is square before tightening your bolts.



When you see this icon you will need a socket wrench. The icons below show the size of attachments needed for assembly 1/2.



For proper assembly you will need to ensure that your structure is level before proceeding to the next step.



This icon warns you to not over tighten your bolts. This is to prevent structural damage and also splintering your wood.



Some steps in the assembly process will require an extra set of hands. Make sure you have a helper available.



A ladder will be needed for assembly. Do NOT stand on the set when it is incomplete, unstable, and not anchored. Failure to do so may result in injury.



This icon shows the size of an open ended wrench. Using the wrench as the fraction bar.



This icon will show you what drill attachments are needed. For this example you will need a Phillips head attachment and 3/8 drill bit.

Basic Setup Dimensions & Assembly Notes

Selecting the correct location for your play product is important for your children's safety and the product's longevity

• The safe play area refers to a zone extending 6'-7" (2m) beyond the play product on all sides, including the space above the play product.


SAFE PLAY AREA DIAGRAM

Ground Dimension

6.25 ft [1.9 m] x 10.02 ft [3.1 m]

Safe Play Area


19.42 ft [5.9 m] x 23.19 ft [7.1 m] x 14.18 ft [4.3 m]

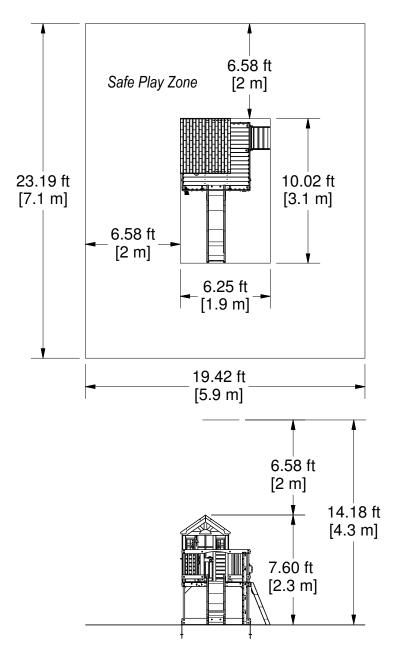


General Information:

Your set has been designed and engineered for children only and for residential use only. A maximum of 150 lbs. per child is recommended for play activities designed for individual use. A maximum of 120 lbs. per child is recommended for play activities designed for multiple child use. A maximum of 6 children is recommended for this playhouse.



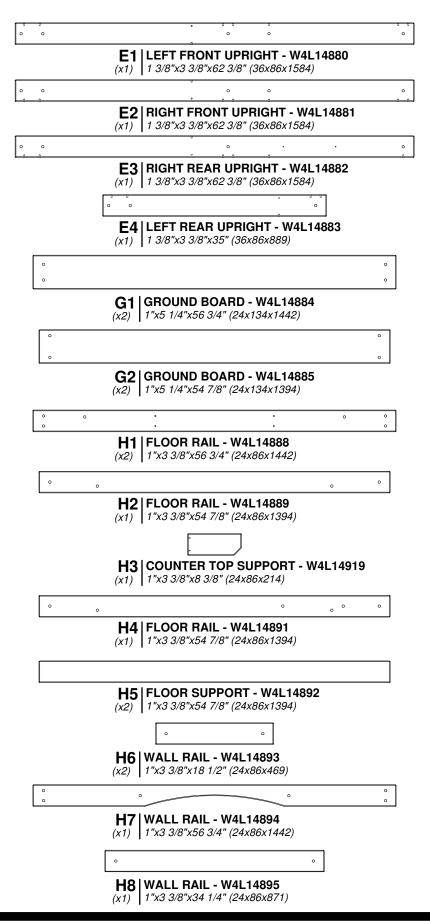





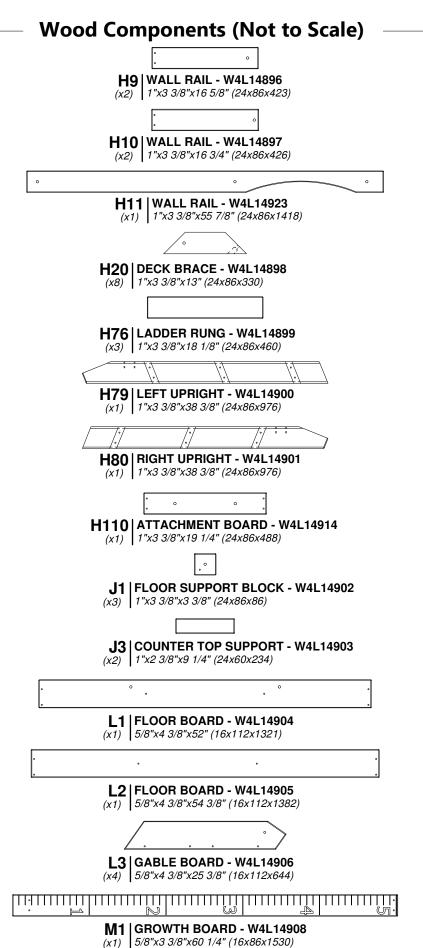




•		
•	• •	
	M4 FLOOR BOARD - W4L14909	
	(x13) 5/8"x3 3/8"x56 3/4" (16x86x1442)	
•	•	
	M6 FLOOR BOARD - W4L14886	
	(x1) 5/8"x3 3/8"x56 3/4" (16x86x1442)	
	0 0	
	M7 WALL BOARD - W4L14887	
	(x2) 5/8"x3 3/8"x26 1/2" (16x86x673)	
	0 0 0 0	
	M10 WALL BOARD - W4L14911	
	(x1) 5/8"x3 3/8"x26 1/2" (16x86x673)	
	•	
	M33 FASCIA BOARD - W4L14912 (x4) 5/8"x3 3/8"x25 5/8" (16x86x652)	
	(10000000000000000000000000000000000000	
	•	
	M73 REAR SUPPORT - W4L14913	
	(x1) 5/8"x3 3/8"x19 1/4" (16x86x488)	
	0 0	
	M77 SLIDE BRACE - W4L13297	
	(x1) 5/8"x3 3/8"x14 1/4" (16x86x362)	
	0 0	
	• •	
	M78 SLIDE BRACE - W4L13298	
	(x1) 5/8"x3 3/8"x14 1/4" (16x86x362)	
	• •	
	N1 TIE STRAP - W4L14915	
	(x8) 5/8"x3 3/8"x3 3/8" (16x86x86)	
	•	
	N2 WINDOW SHELF - W4L14917	
	(x2) 5/8"x2 3/8"x19 1/8" (16x60x485)	
	O1 DICKET WAL 14019	
	O1 PICKET - W4L14918 (x19) 5/8"x1 3/8"x20 1/2" (16x34x520)	
	()	
	•	
Ľ	• • • • • • • • • • • • • • • • • • • •	
	Q1 COUNTER TOP - W4L14907 (x2) 1"x4 3/8"x36 3/4" (24x112x934)	
	(X2) 1 X4 0/0 X00 0/4 (24X112X004)	
	S1 RAIL BOARD - W4L14920	
	(x2) 1"x1"x26 3/4" (24x24x679)	
	S2 WINDOW TRIM - W4L14921	
	(x2) 1"x1"x21 1/2" (24x24x545)	
	S3 WINDOW TRIM - W4L14922	
	(v2) 1"v1"v23 3/8" (24v24v594)	







WP2 REAR RIGHT CORNER PANEL - W2A03154




WP3 FRONT LEFT CORNER PANEL - W2A03157




WP4 REAR LEFT CORNER PANEL - W2A03160



WP5 | REAR CENTER PANEL - W2A03163 | 1 1/4"x18 7/8"x20 7/8" (32x478x536)



WP6 LEFT CENTER PANEL - W2A03164 (x1) 1 1/4"x18 7/8"x20 7/8" (32x478x536)

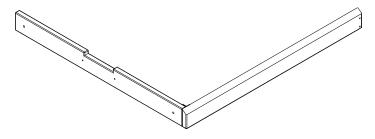


WP8 HEADER ASSEMBLY - W2A03165

		•		

RP1 | LOWER ROOF PANEL - W2A03166 | 1 3/8"x13"x44 7/8" (35x329x1140)

					:
•		1		1	•

RP2 | UPPER ROOF PANEL - W2A03167 (*x*2) | 1 3/8"x12 3/4"x44 7/8" (35x324x1140)




Parts Identification

Hardware Components














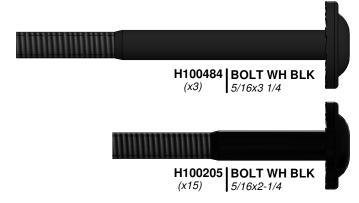










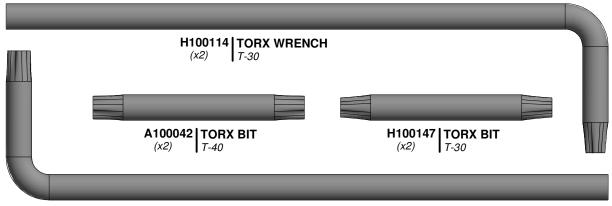

A100041 TORX WRENCH

Parts Identification

Hardware Components

H100395 | SCREW PFH BLK (x2) | 8x3/4

H100385 | SCREW PFH BLK (x26) | 8x1

H100380 SCREW PFH BLK (x46) 8x1 1/8

H100387 | SCREW PFH BLK (x64) | 8x1-1/4

H100200 | SCREW PFH BLK (x138) | 8x1 1/2

H100382 SCREW PFH BLK (x10) 8x1 3/4

H100391 | SCREW PFH BLK | 8x2

H100483 | SCREW PFH BLK | 8x2 1/4

H100201 | SCREW PFH BLK | 8x2-1/2

H100408 | SCREW PWH BLK (x9) | 8x1/2

H100202 | SCREW PWH BLK 8x5/8

H100392 SCREW PWH BLK (x11) 8x3/4

H100797 | SCREW PWH BLK (X7) | 8x1

H100806 | SCREW POH BLK (x13) | 8/32x1 1/8









H100198 WASHER LOCK EXT BLK




H100199 | WASHER LOCK EXT BLK | 12x19



 $\begin{array}{c|c} \textbf{H100405} & \textbf{WASHER LOCK EXT BLK} \\ (x17) & 6x15 \end{array}$




H100400 WASHER LOCK EXT BLK 8x15







Accessory Components (Not to Scale)







A100361 PLASTIC SUNBURST





 $\left. {
m A4M00528}\atop (\chi 1) \right|$ BYD ID TAG (MEDIUM) AGES 2 TO 10



 $\left. \begin{array}{c} \text{A4M01047} \\ \text{(x3)} \end{array} \right| \text{L BRACKET 2.5x38x55x55}$













Accessory Components (Not to Scale)



 $A4M00624 \mid HINGE (DOOR, SPRING LOADED)$



 $A4M00994 \atop (x1)$ HINGE (DOOR, NON-SPRING LOADED)



 $\left. \begin{smallmatrix} \mathbf{A4M00933} \\ (\times 1) \end{smallmatrix} \right| \mathbf{DOOR} \ \mathbf{STOP}$



 $\left. \begin{array}{c|c} \mathbf{A4M01045} \\ \hline (X1) \end{array} \right| \mathbf{BELL} \ \mathbf{ASSEMBLY}$






 $A6P00391 \atop (\chi 1)$ 6 FT SLIDE BED



Accessory Components (Not to Scale)



 ${{\sf A6P00335}\atop({\it x1})}$ STOVE BASE



 ${A6P00330\atop (\chi1)}$ INDUCTIVE BURNER KIT



 $\left. \begin{smallmatrix} \mathbf{A6P00331} \\ (\times^{1}) \end{smallmatrix} \right| \mathbf{BLENDER}$



 $\begin{array}{c|c} \mathbf{A6P00338} & \mathbf{FRY\ PAN} \\ (\times 1) & \end{array}$



 $\left. \begin{smallmatrix} \mathbf{A6P00336} \\ (\times 1) \end{smallmatrix} \right| \mathbf{BOIL} \ \mathbf{POT}$



 $_{(\chi 1)}^{\text{A6P00339}} \Big| \text{SPATULA}$



A6P00337 POT/PAN LID






STEP 1




A6P00391 6 FT SLIDE BED






H100396 BOLT WH BLK




PLACE 'M77' SLIDE BRACE BOARD 1/2" FROM THE BOTTOM EDGE OF THE SLIDE BED. USING THE BOARD AS A TEMPLATE, MARK WHERE THE PILOT HOLES WILL BE DRILLED. USE A 3/8" DRILL BIT TO DRILL THE PILOT HOLES INTO THE SLIDE BED. ATTACH THE SLIDE BED SUPPORT BOARD USING THE HARDWARE PROVIDED.

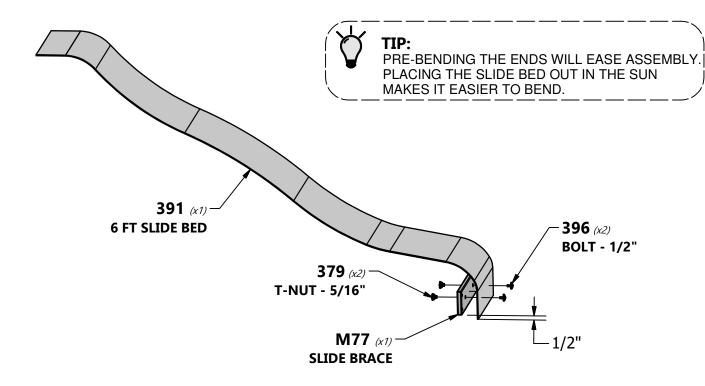






STEP 2









NOTE:

1. PLACE THE SLIDE RAIL ON FLAT SURFACE. STARTING AT THE BOTTOM, INSERT THE SLIDE BED INTO THE CHANNEL ON THE INSIDE OF THE RAIL. HOLD THE SLIDE BED IN PLACE WHILE A HELPER BENDS THE SLIDE BED INTO THE CHANNEL. MAKE SURE THE SLIDE BED IS COMPLETELY INSERTED INTO THE CHANNEL. SEE VIEWING WINDOW BELOW.

2. INSERT THE TWO CENTER SLIDE BRACES INTO THEIR RESPECTIVE LOCATIONS.

3. USE A 1/8" DRILL BIT, DRILL PILOT HOLES IN EACH INDENTATION ALONG EACH SIDE RAIL. THERE SHOULD BE 12 INDENTIONS ON EACH RAIL. BE SURE TO DRILL THOUGH THE SLIDE RAIL AND THE SLIDE BED. THEN SECURE WITH THE PROVIDED HARDWARE.

REPEAT THIS PROCESS FOR THE OPPOSITE SLIDE RAIL.




TIP:

A HELPER IS REQUIRED FOR THIS STEP.



FAILURE TO INSERT SLIDE BED COMPLETELY AND SECURED BY SCREWS MAY RESULT IN INJURY OR AMPUTATION.



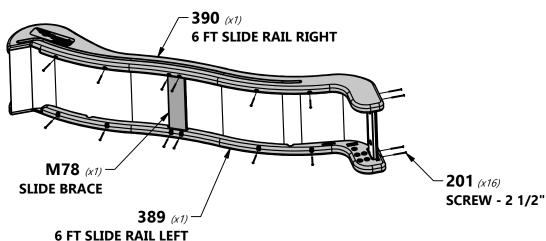



- VIEWING WINDOW







H79 | LEFT UPRIGHT - W4L14900 (x1) | 1"x3 3/8"x38 3/8" (24x86x976)

H76 | LADDER RUNG - W4L14899 (x3) | 1"x3 3/8"x18 1/8" (24x86x460)



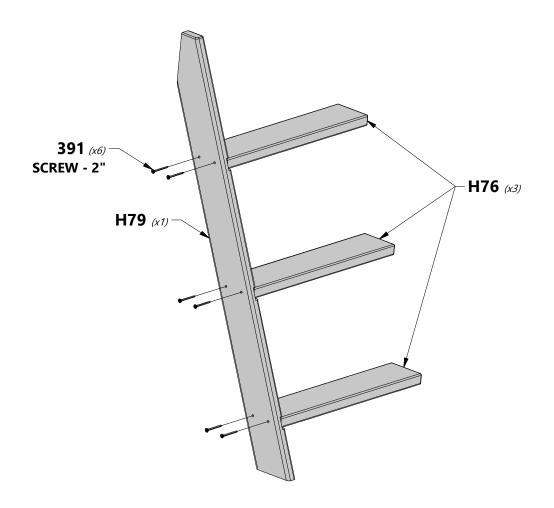

H80 | RIGHT UPRIGHT - W4L14901 (x1) | 1"x3 3/8"x38 3/8" (24x86x976) H100391 | SCREW PFH BLK (x6) | 8x2

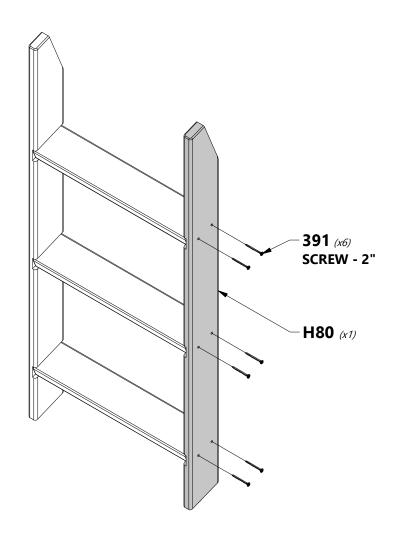





STEP 3

• •

M73 | REAR SUPPORT - W4L14913 (x1) | 5/8"x3 3/8"x19 1/4" (16x86x488)



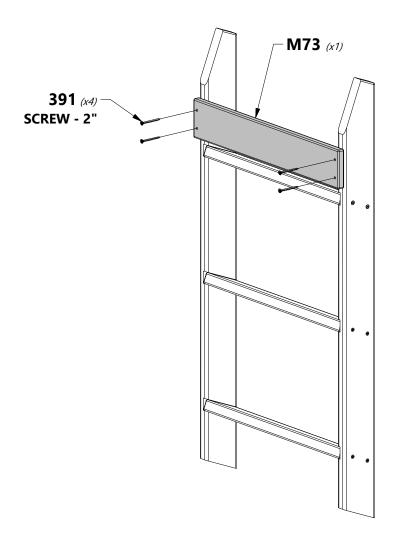


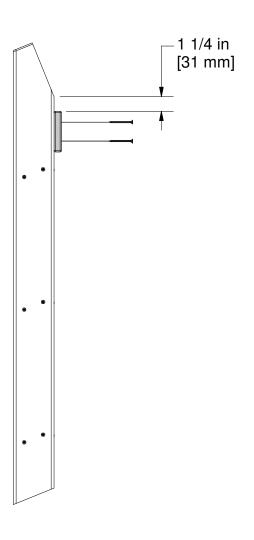



H110 | ATTACHMENT BOARD - W4L14914 | 1"x3 3/8"x19 1/4" (24x86x488)



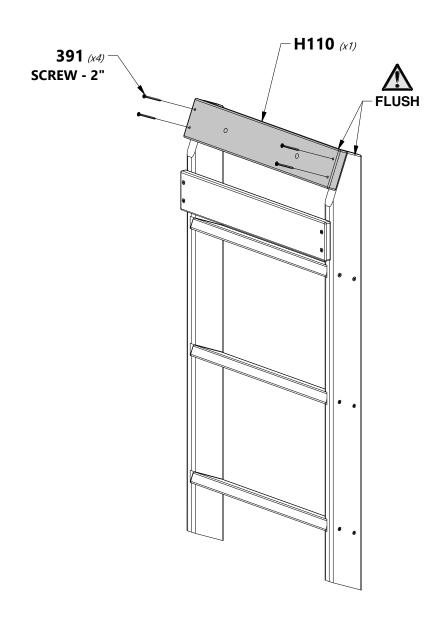

DECK ASSEMBLY H2|FLOOR RAIL - W4L14889 **LEFT FRONT UPRIGHT - W4L14880 J1** | FLOOR SUPPORT BLOCK - W4L14902 (x1) | 1 3/8"x3 3/8"x62 3/8" (36x86x1584) (x1) 1"x3 3/8"x54 7/8" (24x86x1394) (x1) 1"x3 3/8"x3 3/8" (24x86x86) **E4** | LEFT REAR UPRIGHT - W4L14883 G2 | GROUND BOARD - W4L14885 (x1) 1 3/8"x3 3/8"x35" (36x86x889) (x1) | 1"x5 1/4"x54 7/8" (24x134x1394) H100484 BOLT WH BLK 5/16x3 1/4 H100379 T-NUT BLK 5/16 H100205 BOLT WH BLK H100483 SCREW PFH BLK H100198 WASHER LOCK EXT BLK (x5) 5/16x2-1/4 8x2 1/4 (x6) NOTE: WE RECOMMEND THAT YOU INSTALL ALL "T-NUTS" FIRST, WHEN A "T-NUT" IS REQUIRED, THROUGHOUT THE ASSEMBLY PROCESS. NOTE HOLE LOCATION **CLOSER TO TOP EDGE.** 484 (x1) 379 (x1) **BOLT - 3 1/4"** T-NUT - 5/16" 198 (x1) WASHER - 8x19 483 (x1) NOTE HOLE LOCATION FOR PROPER INSTALLATION. SCREW - 8x2 1/4" **205** (x1) **BOLT - 2 1/4" E1** (x1) **198** (x1) **WASHER - 8x19**



STEP 2


0	٥
0	0

G1 | GROUND BOARD - W4L14884 (x2) | 1"x5 1/4"x56 3/4" (24x134x1442)







H100198 WASHER LOCK EXT BLK 8x19

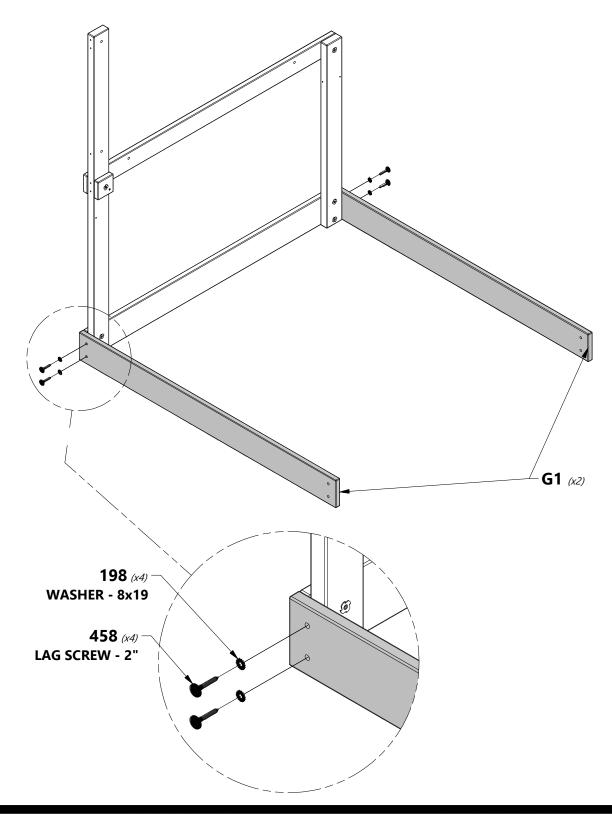



STEP 3

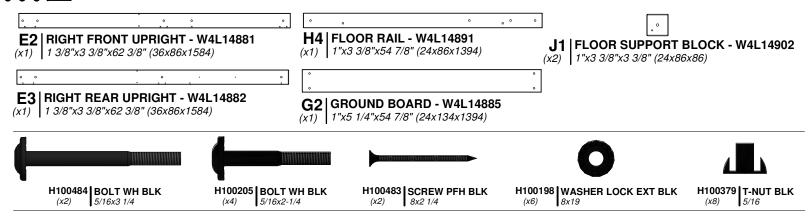


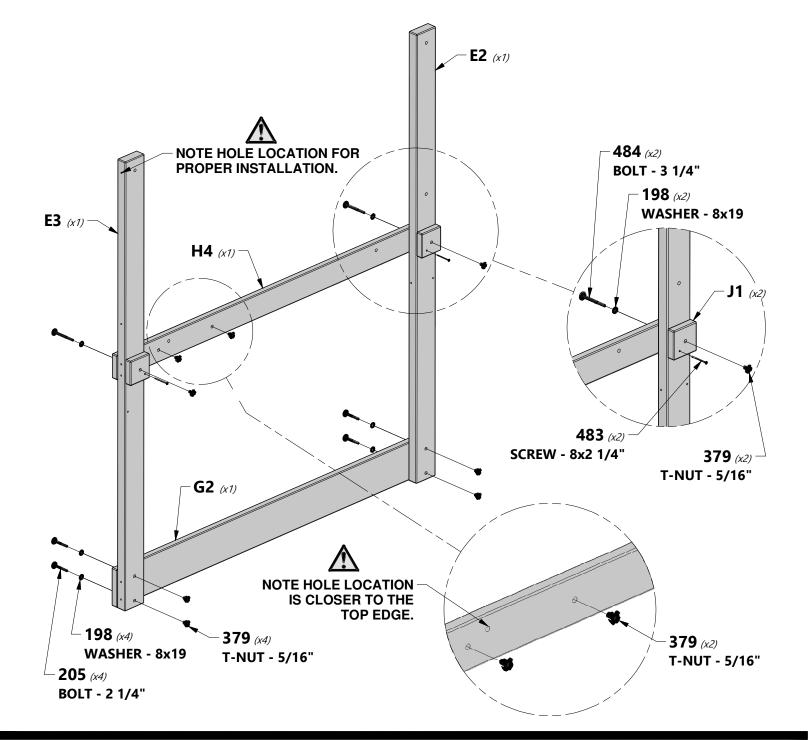








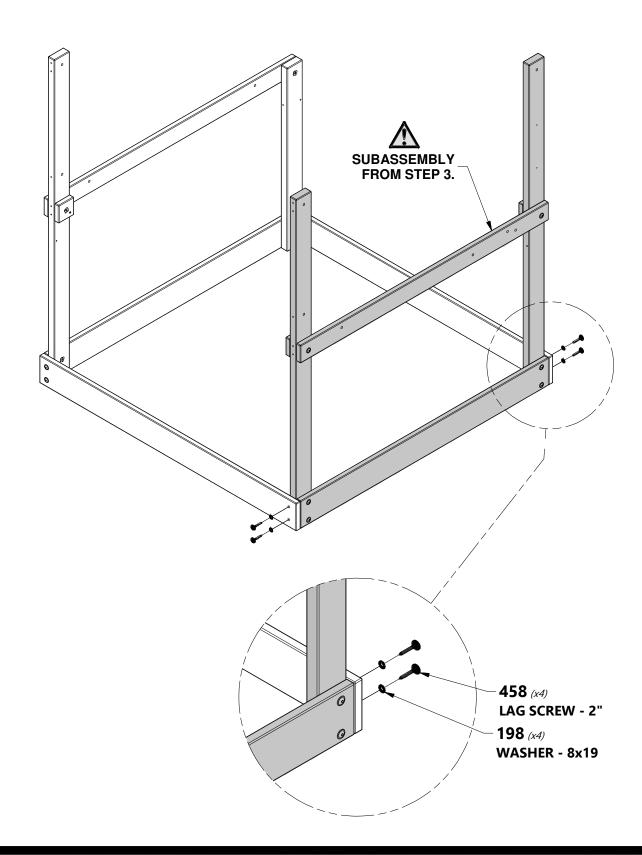





H1 | FLOOR RAIL - W4L14888 (x1) | 1"x3 3/8"x56 3/4" (24x86x1442)





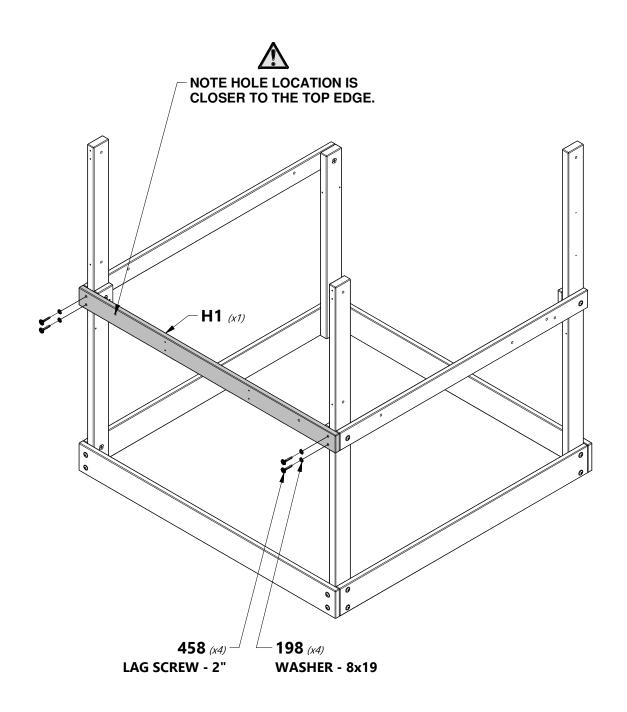




H1 | **FLOOR RAIL - W4L14888** (x1) | 1"x3 3/8"x56 3/4" (24x86x1442)






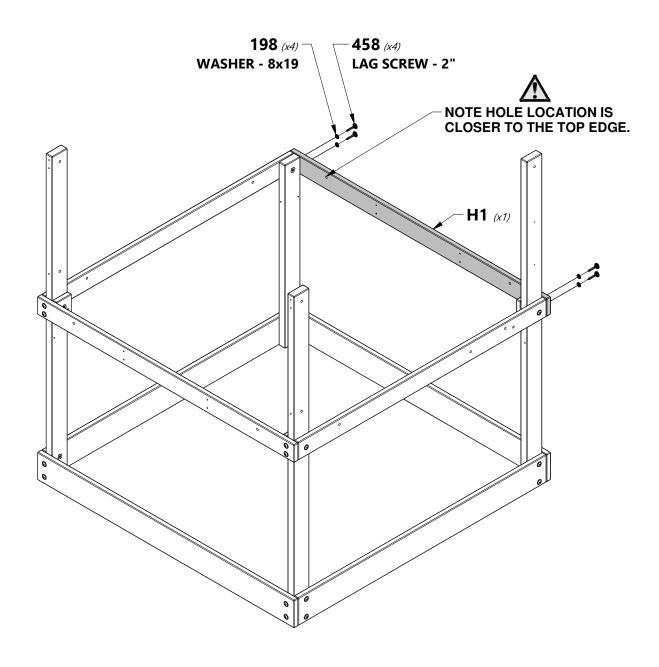



DECK ASSEMBLY

STEP 7








 $\begin{array}{c|c} \textbf{H100198} & \textbf{WASHER LOCK EXT BLK} \\ (x8) & 8x19 \end{array}$




H100405 WASHER LOCK EXT BLK



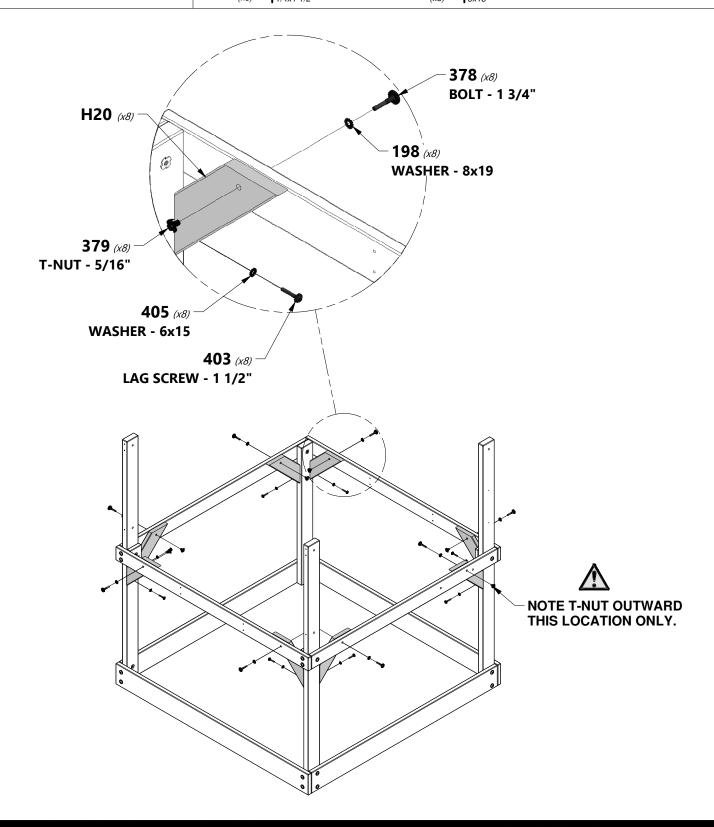

H100201 | SCREW PFH BLK | 8x2-1/2

H5 | **FLOOR SUPPORT - W4L14892** (x2) | 1"x3 3/8"x54 7/8" (24x86x1394)

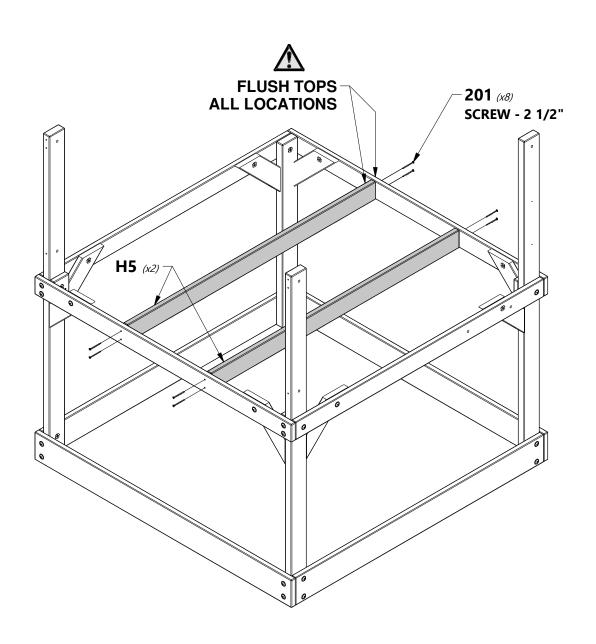



L1 | FLOOR BOARD - W4L14904 (x1) 5/8"x4 3/8"x52" (16x112x1321)

L2 | FLOOR BOARD - W4L14905 (x1) | 5/8"x4 3/8"x54 3/8" (16x112x1382)

M4|FLOOR BOARD - W4L14909

(x13) 5/8"x3 3/8"x56 3/4" (16x86x1442)


M6 | FLOOR BOARD - W4L14886 (x1) | 5/8"x3 3/8"x56 3/4" (16x86x1442)






NOTE:


ALL FLOOR BOARDS SHOULD BE SPACED EVENLY.

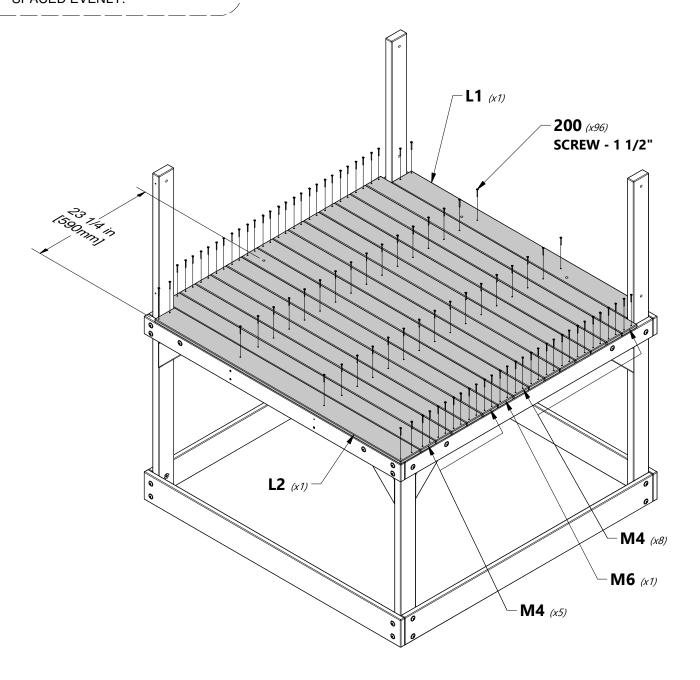

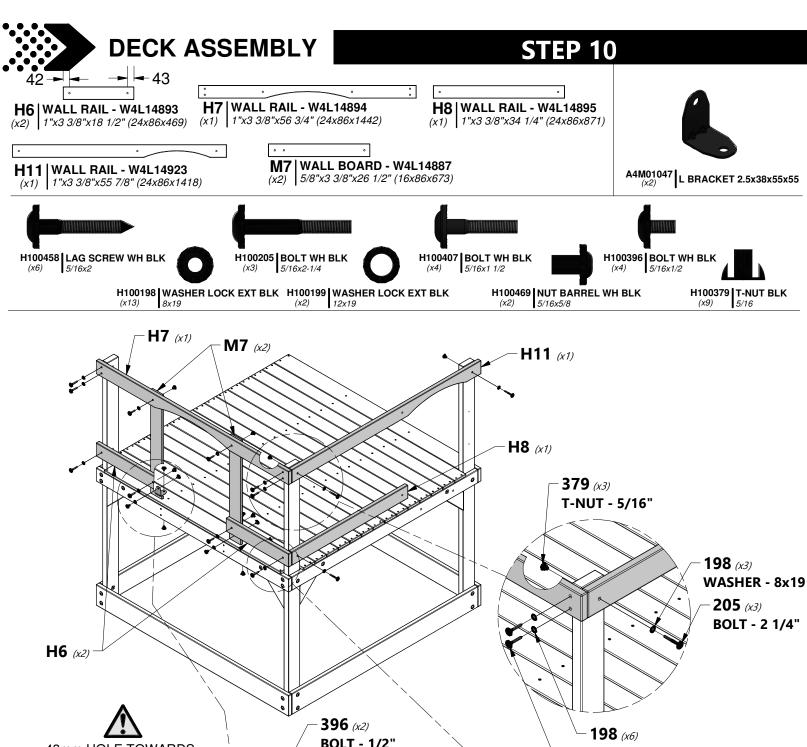


DECK ASSEMBLY

STEP 11















H100171 | BOLT WH BLK








H100198 WASHER LOCK EXT BLK

H100199 WASHER LOCK EXT BLK


H100405 WASHER LOCK EXT BLK 6x15

H100379 T-NUT BLK

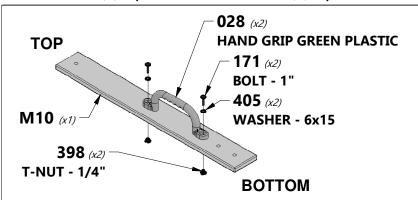



NOTE:ASSEMBLE HAND GRIP TO 'M10' BOARD FIRST.

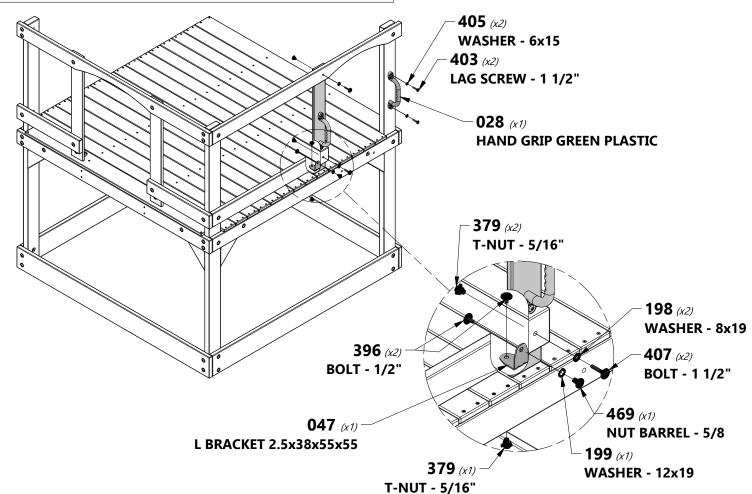







H9 | WALL RAIL - W4L14896 (x2) | 1"x3 3/8"x16 5/8" (24x86x423)

S1 | **RAIL BOARD - W4L14920** (x1) | 1"x1"x26 3/4" (24x24x679)





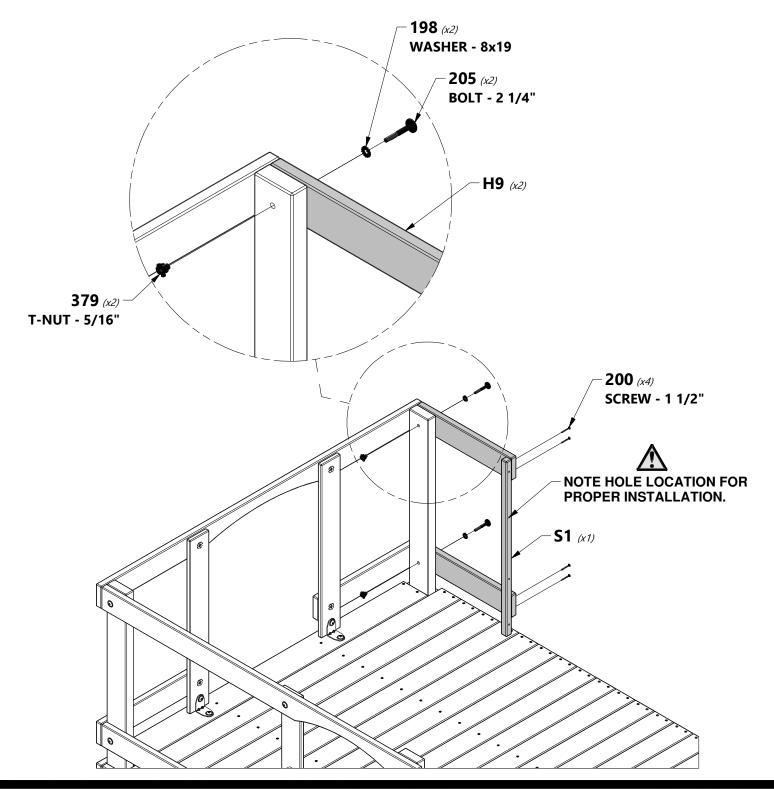






H10 | WALL RAIL - W4L14897 (x2) | 1"x3 3/8"x16 3/4" (24x86x426)

S1 | RAIL BOARD - W4L14920 | 1"x1"x26 3/4" (24x24x679)






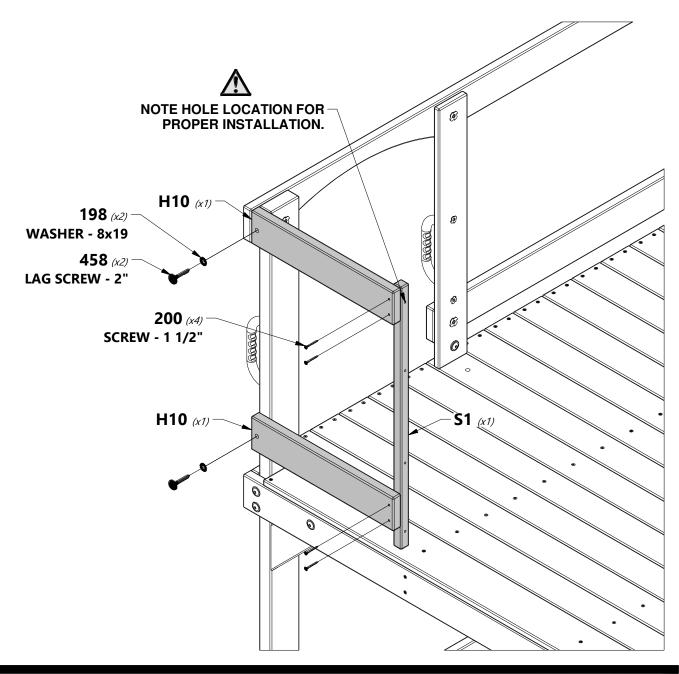


0

O1 | PICKET - W4L14918 (x3) | 5/8"x1 3/8"x20 1/2" (16x34x520)



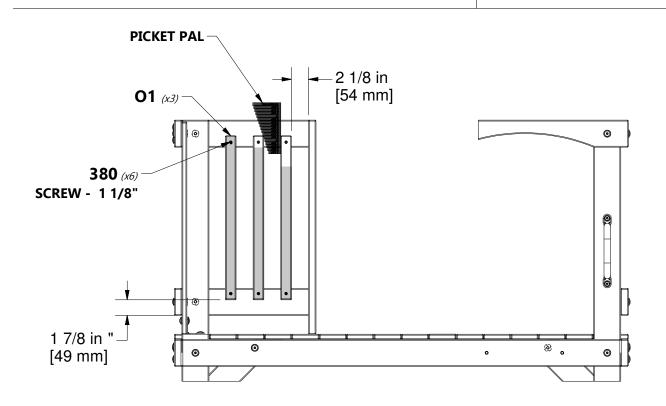



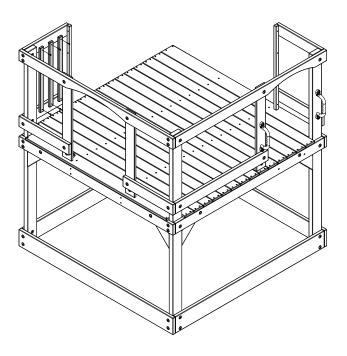






0 0

O1 | **PICKET - W4L14918** (x6) | 5/8"x1 3/8"x20 1/2" (16x34x520)



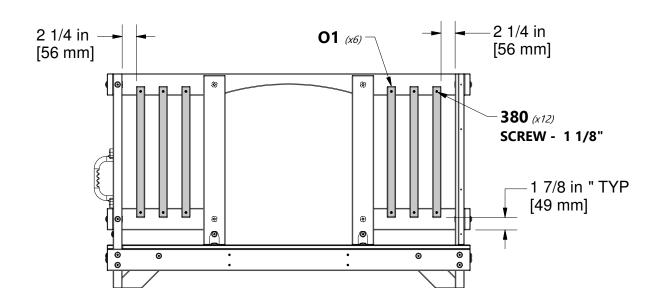



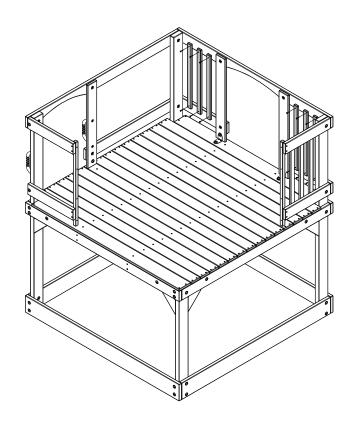






0 0

O1 | PICKET - W4L14918 (x7) | 5/8"x1 3/8"x20 1/2" (16x34x520)



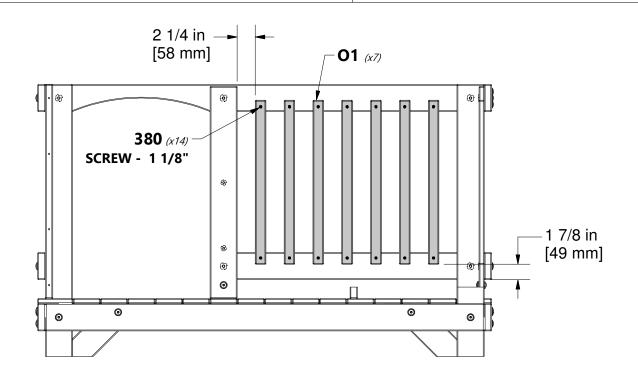




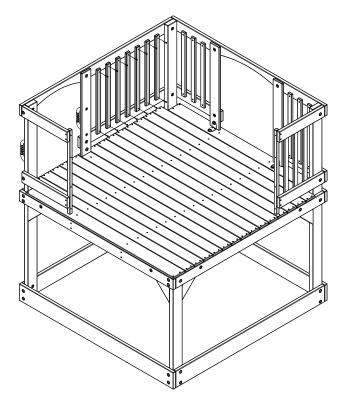





O1 | PICKET - W4L14918 (x3) | 5/8"x1 3/8"x20 1/2" (16x34x520)




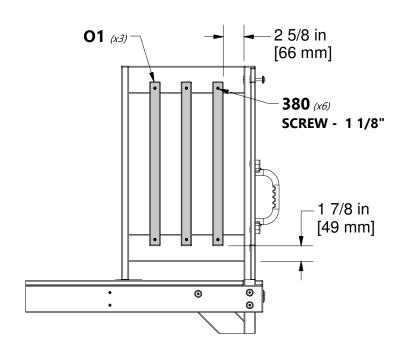




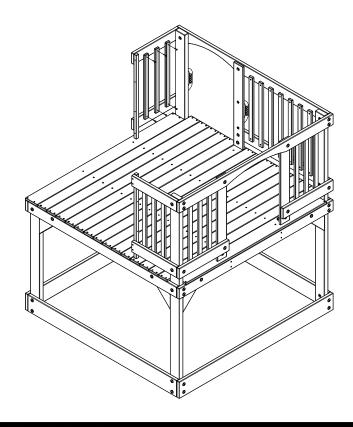







WP1 FRONT RIGHT CORNER PANEL - W2A03151




 $\begin{array}{c} \mathbf{WP2} \\ (x1) \end{array}$ REAR RIGHT CORNER PANEL - W2A03154



 $\begin{array}{c} \textbf{WP3} \\ (x1) \end{array} | \textbf{FRONT LEFT CORNER PANEL - W2A03157}$



WP4 REAR LEFT CORNER PANEL - W2A03160

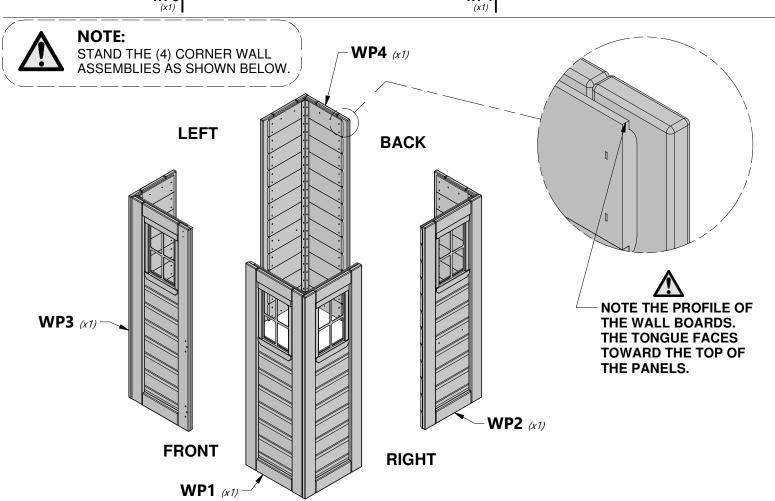




STEP 2




WP6 LEFT CENTER PANEL - W2A03164 (x1) 1 1/4"x18 7/8"x20 7/8" (32x478x536)



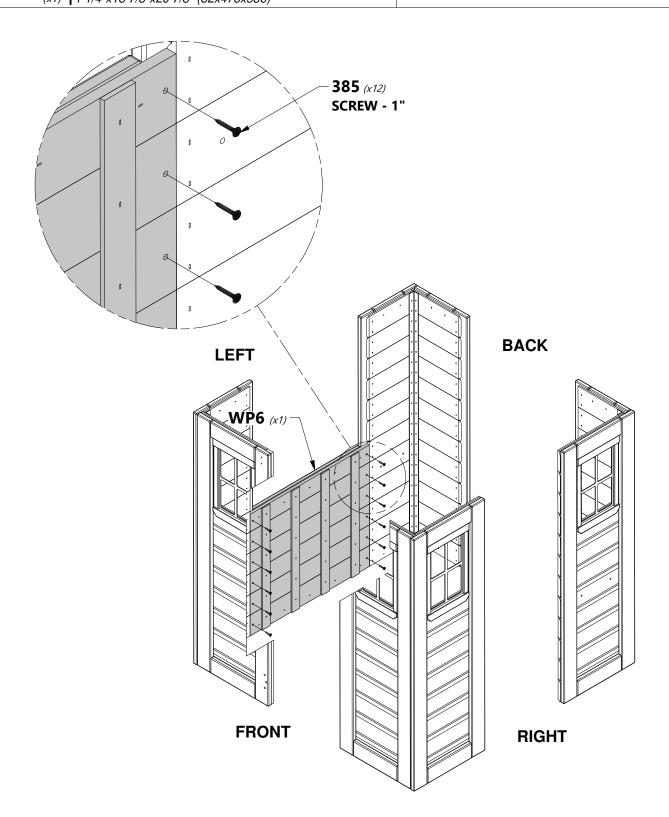




STEP 3




H100385 SCREW PFH BLK (x12) 8x1

WP5 | REAR CENTER PANEL - W2A03163 | 1 1/4"x18 7/8"x20 7/8" (32x478x536)

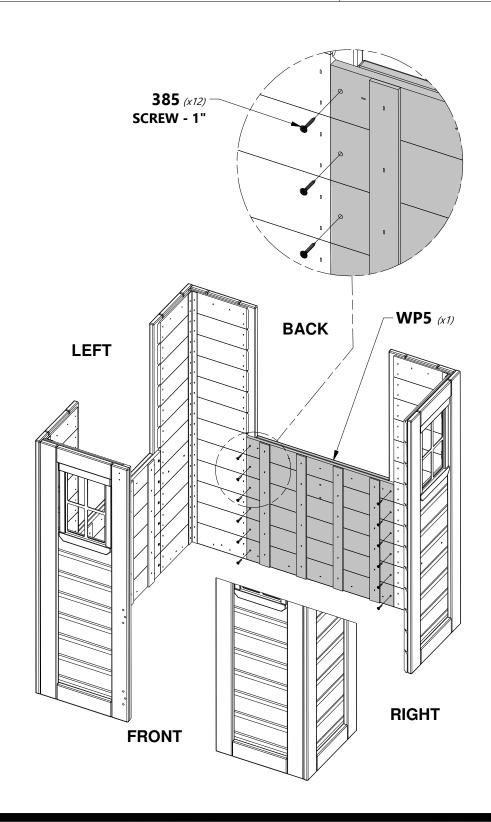



STEP 4




H100201 SCREW PFH BLK
(x4) 8x2-1/2

WP8 HEADER ASSEMBLY - W2A03165

ALL INTERIOR SURFACES ARE FLUSH. **201** (x4) **WP8** (x1) **SCREW - 2 1/2" LEFT BACK** WP8 **RIGHT FRONT**




STEP 5



N1 | TIE STRAP - W4L14915 (x8) | 5/8"x3 3/8"x3 3/8" (16x86x86)



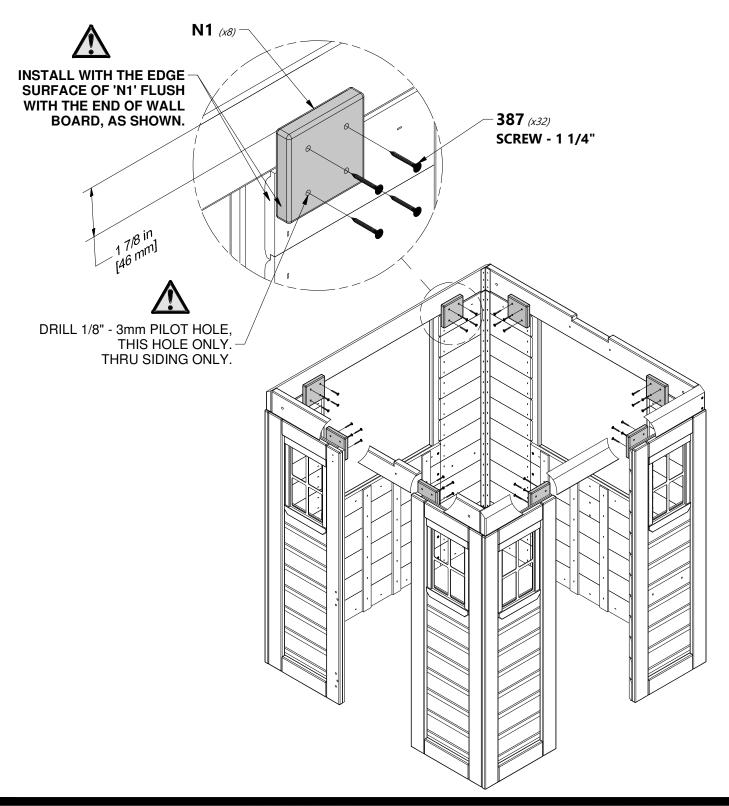



L3 | GABLE BOARD - W4L14906 (x4) | 5/8"x4 3/8"x25 3/8" (16x112x644)


STEP 6



H100405 WASHER LOCK EXT BLK
(x4) 6x15





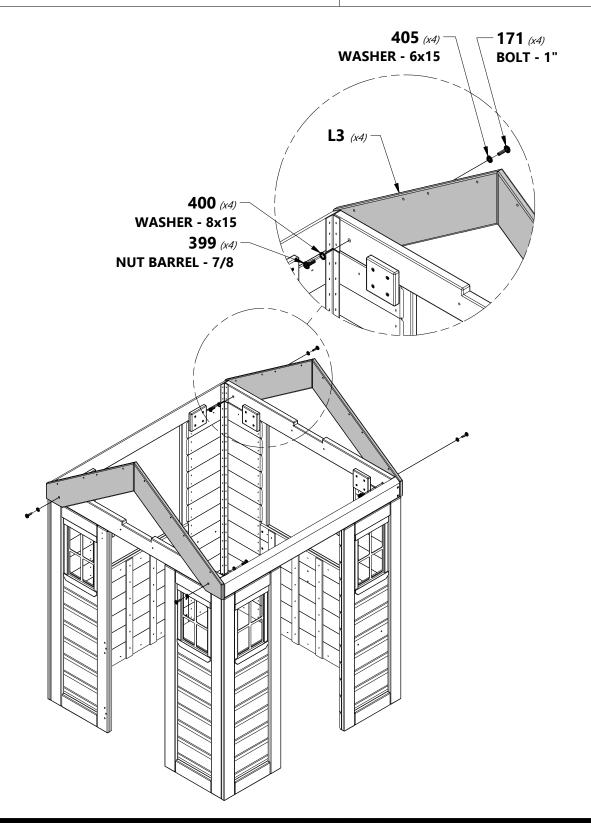













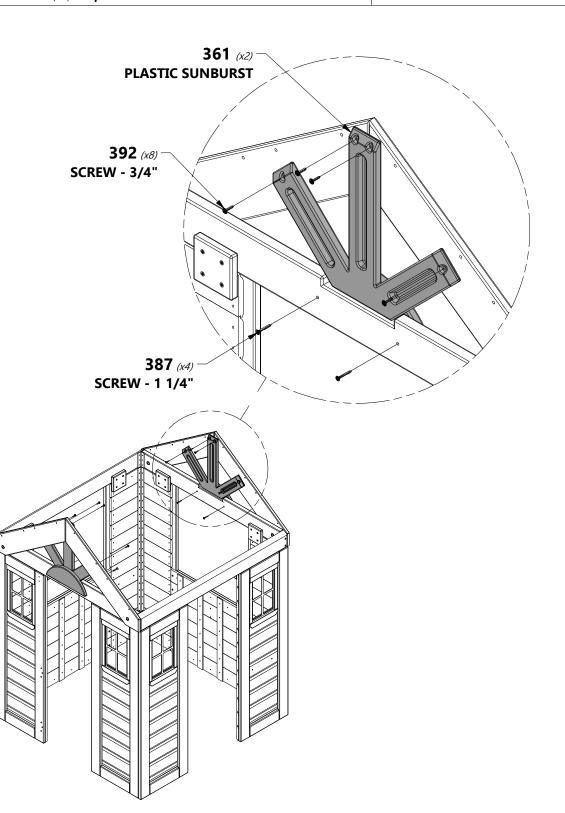




STEP 8



RP2 UPPER ROOF PANEL - W2A03167 (x2) 1 3/8"x12 3/4"x44 7/8" (35x324x1140)



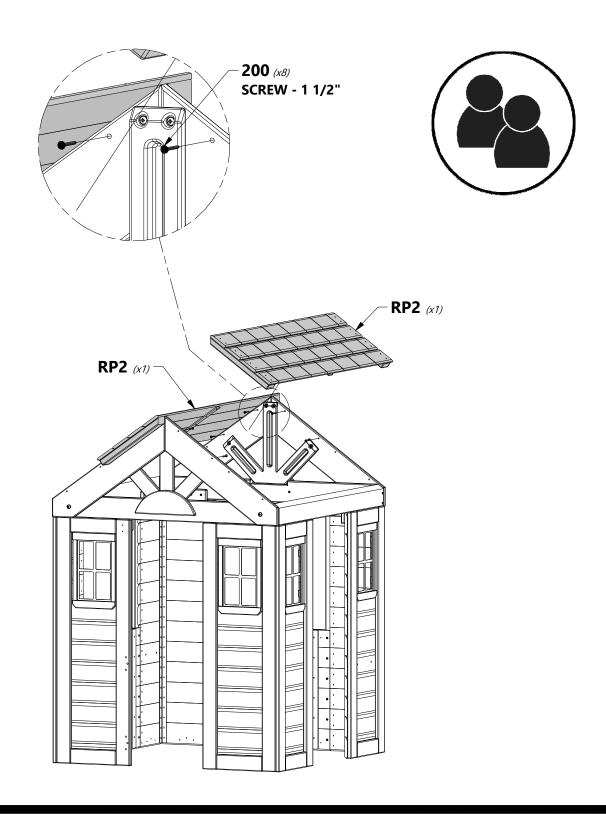




STEP 9

,														F -	
														Ċ	
														Ţ	
Ţ	;											,			

RP1 | LOWER ROOF PANEL - W2A03166 (x2) | 1 3/8"x13"x44 7/8" (35x329x1140)



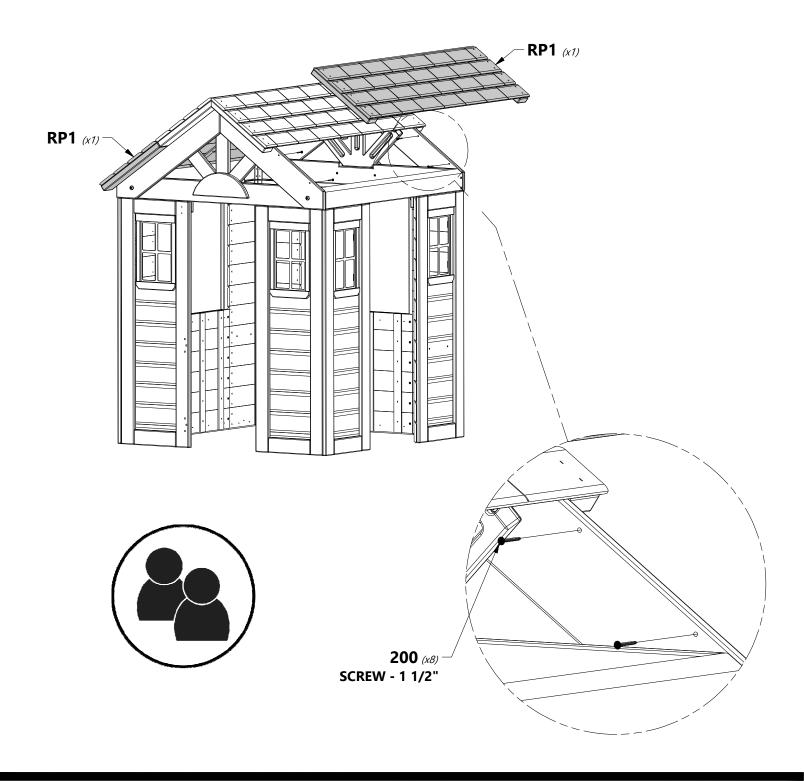




. . .

N2 | WINDOW SHELF - W4L14917 (x1) | 5/8"x2 3/8"x19 1/8" (16x60x485)

H100387 SCREW PFH BLK 8x1-1/4

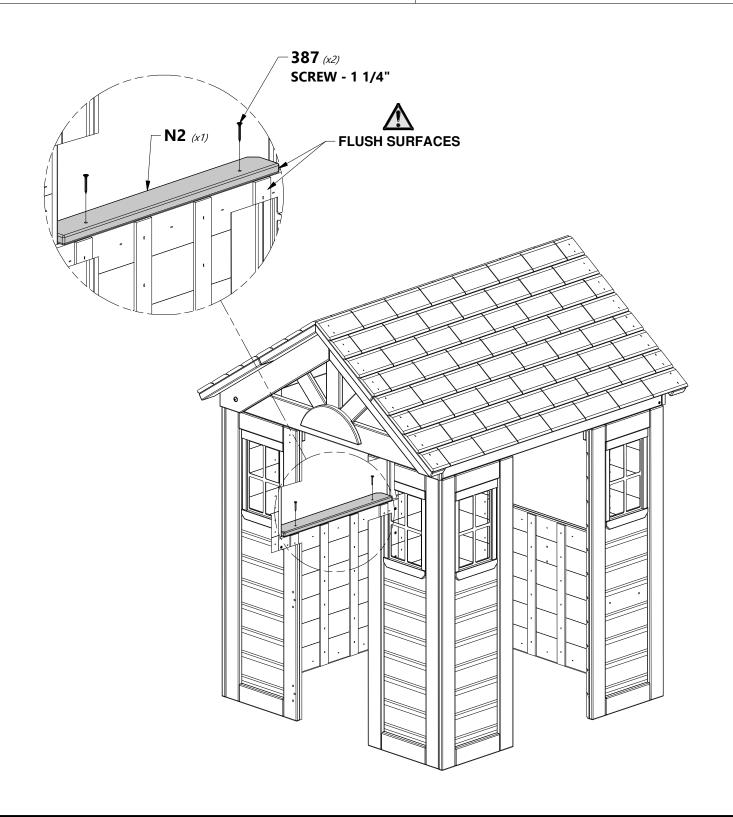





. .

N2 | WINDOW SHELF - W4L14917 (x1) | 5/8"x2 3/8"x19 1/8" (16x60x485)


H100387 | SCREW PFH BLK (x2) | 8x1-1/4

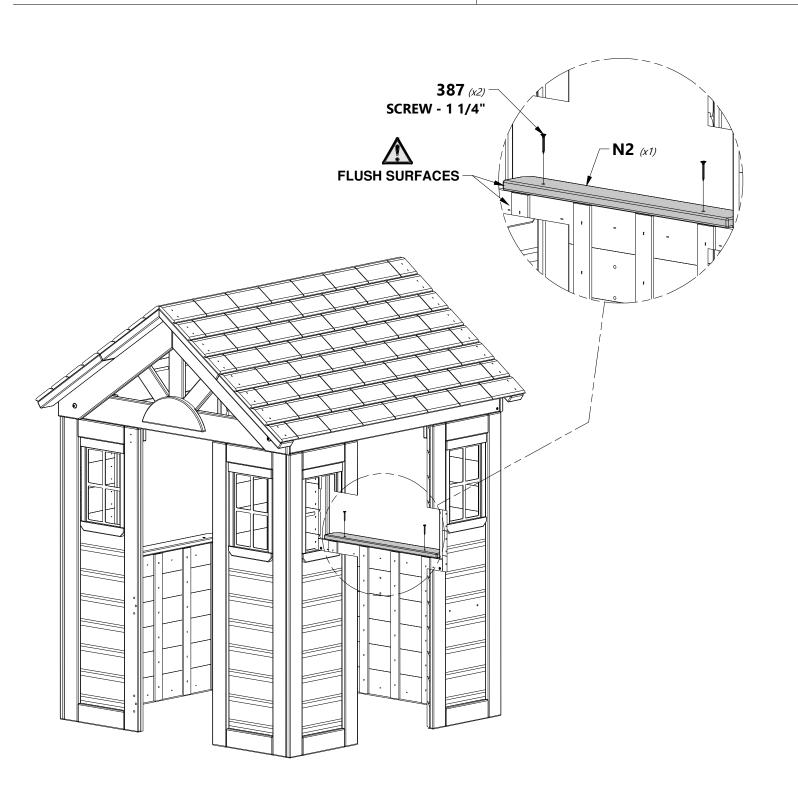







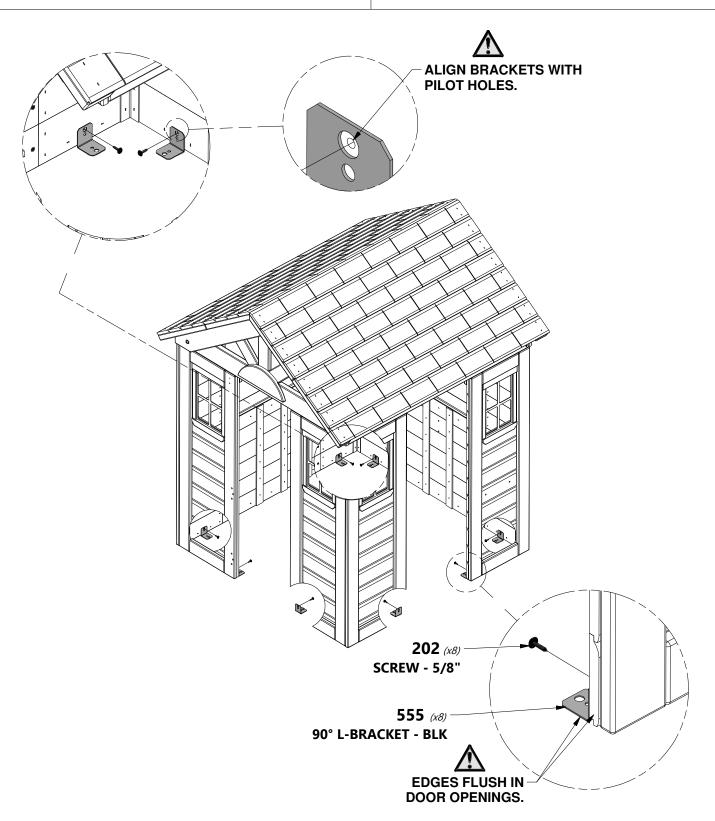




STEP 13



H100200 SCREW PFH BLK 8x1 1/2

H3 | COUNTER TOP SUPPORT - W4L14919 (x1) | 1"x3 3/8"x8 3/8" (24x86x214)

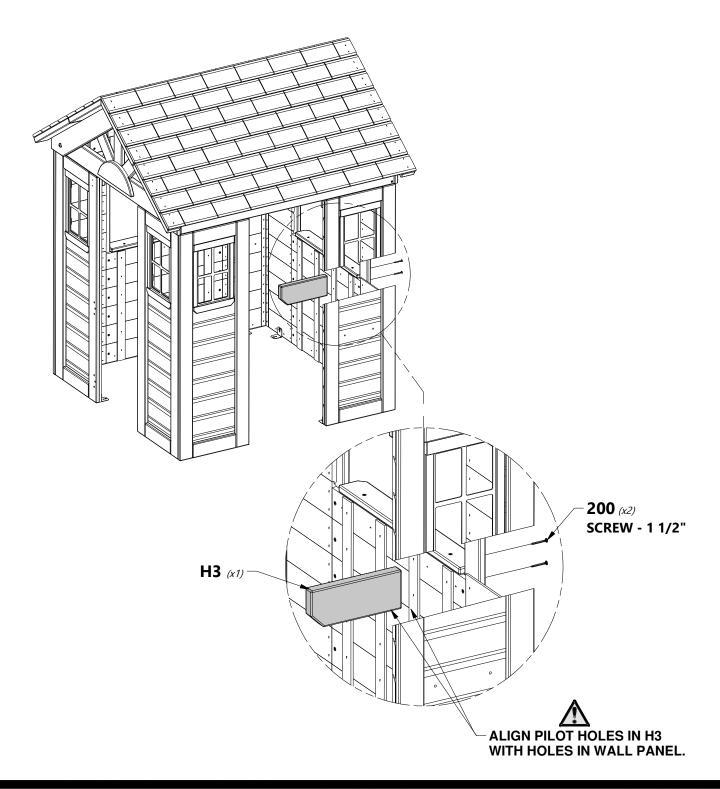




STEP 14



J3 | COUNTER TOP SUPPORT - W4L14903 (x2) | 1"x2 3/8"x9 1/4" (24x60x234)



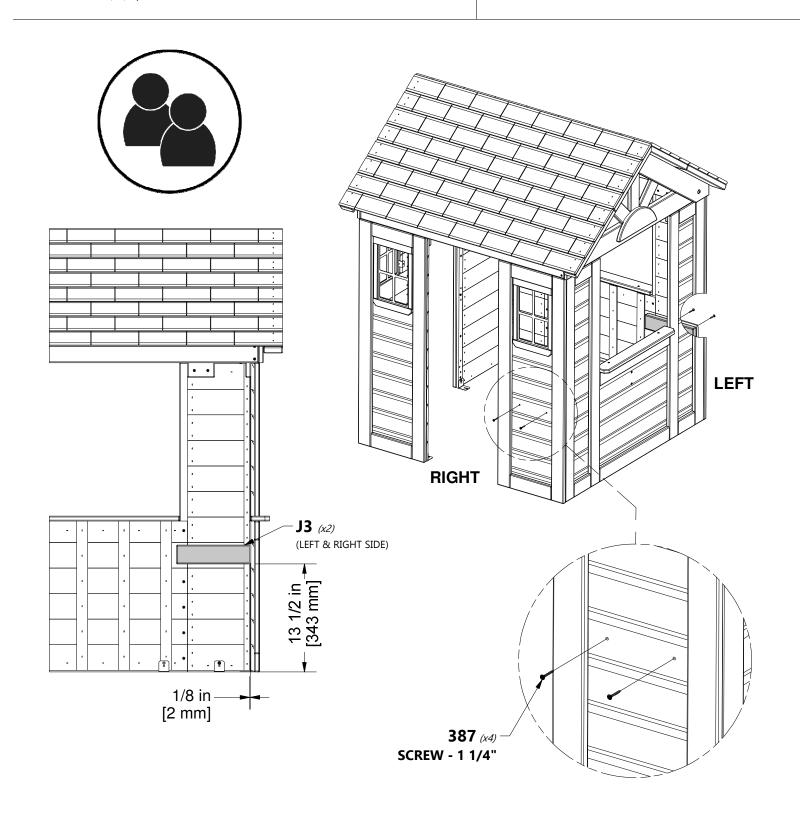





STEP 15

• • •


Q1 | COUNTER TOP - W4L14907 (x2) | 1"x4 3/8"x36 3/4" (24x112x934)



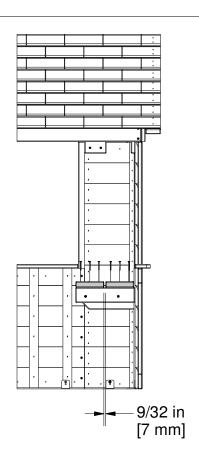

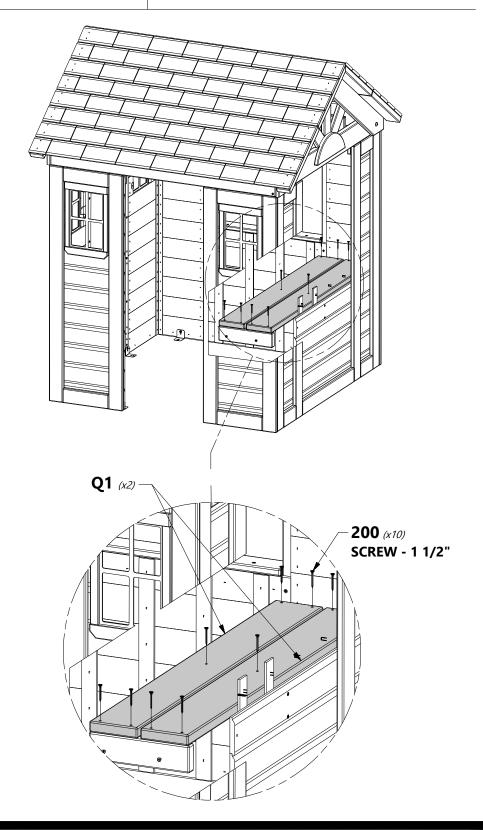











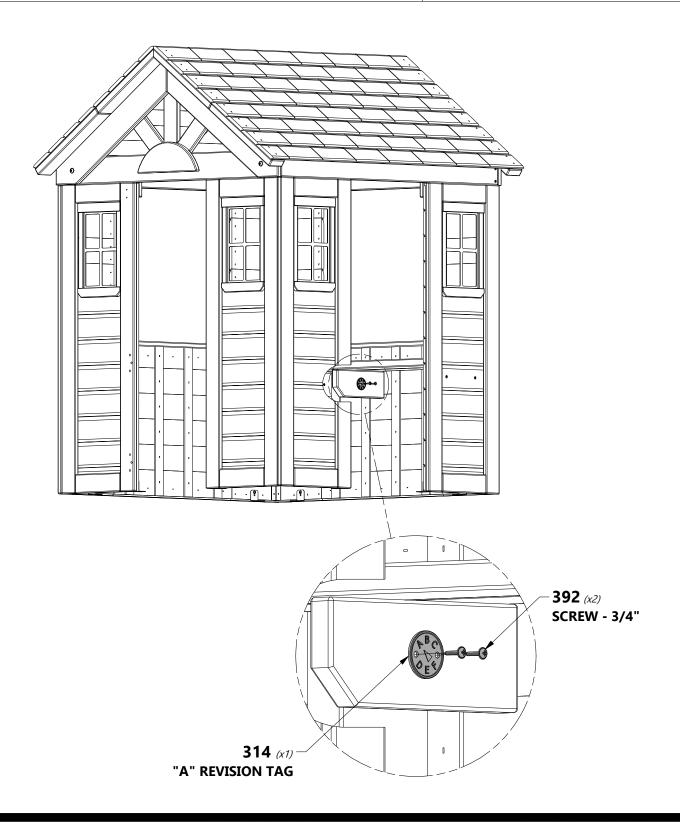








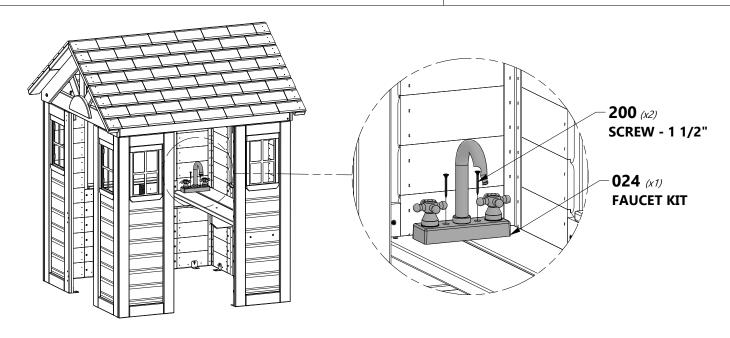


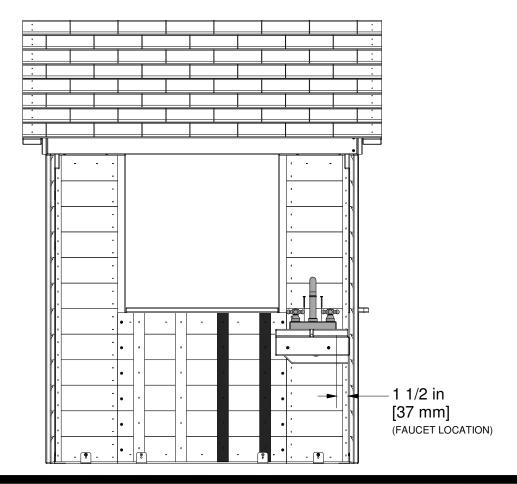









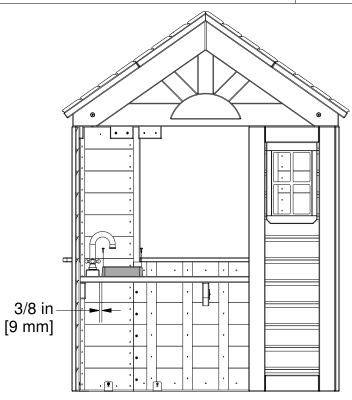


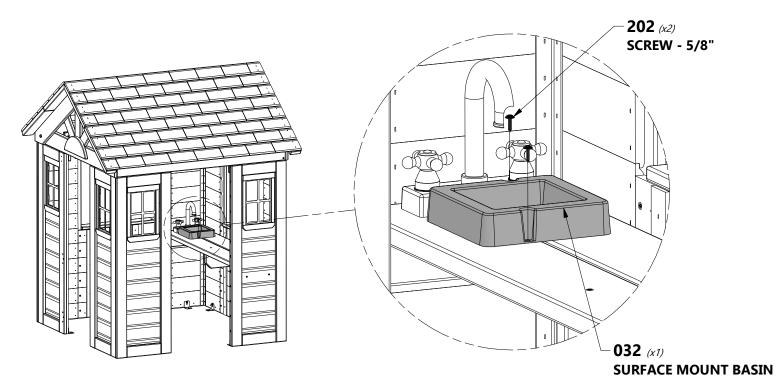







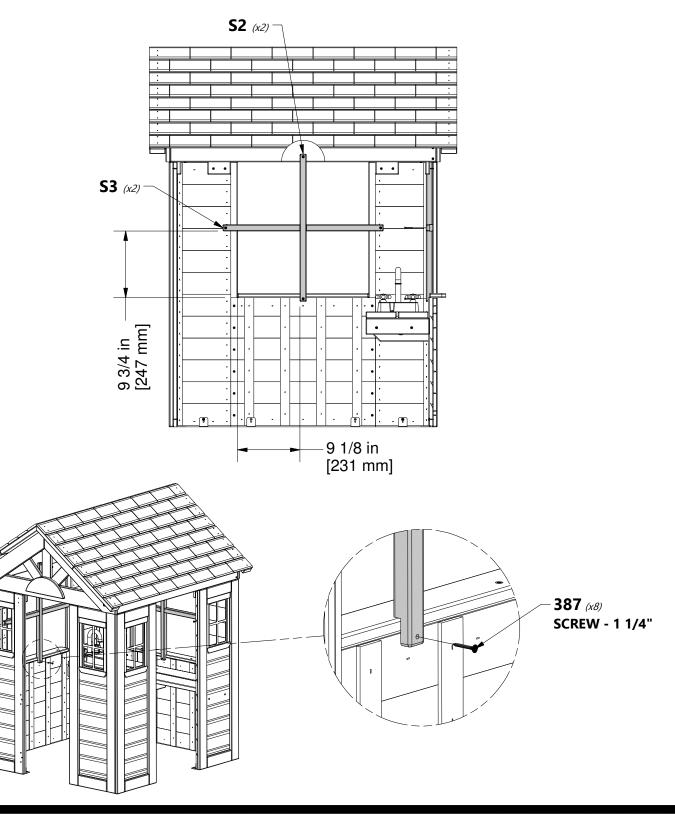











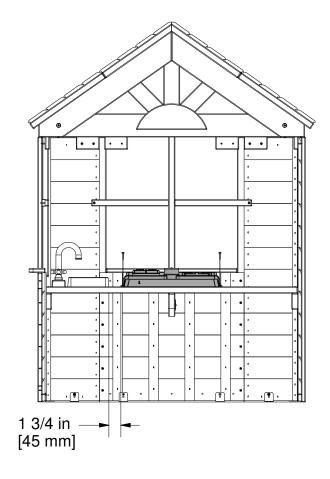

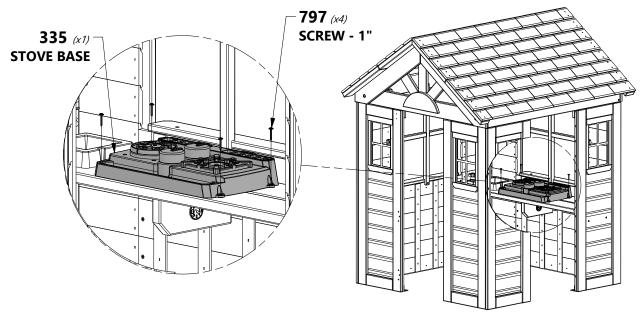






H100387 SCREW PFH BLK (x4) 8x1-1/4

M33 | FASCIA BOARD - W4L14912 (x2) | 5/8"x3 3/8"x25 5/8" (16x86x652)

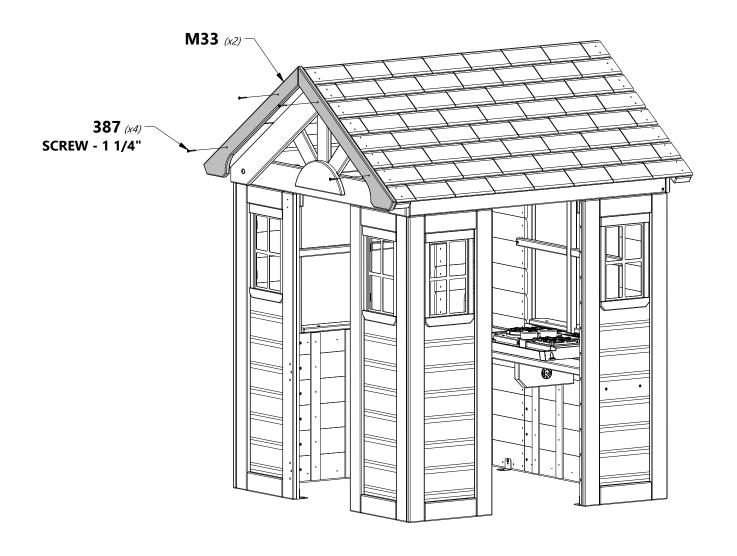







H100387 SCREW PFH BLK (x4) 8x1-1/4

M33 | FASCIA BOARD - W4L14912 (x2) | 5/8"x3 3/8"x25 5/8" (16x86x652)

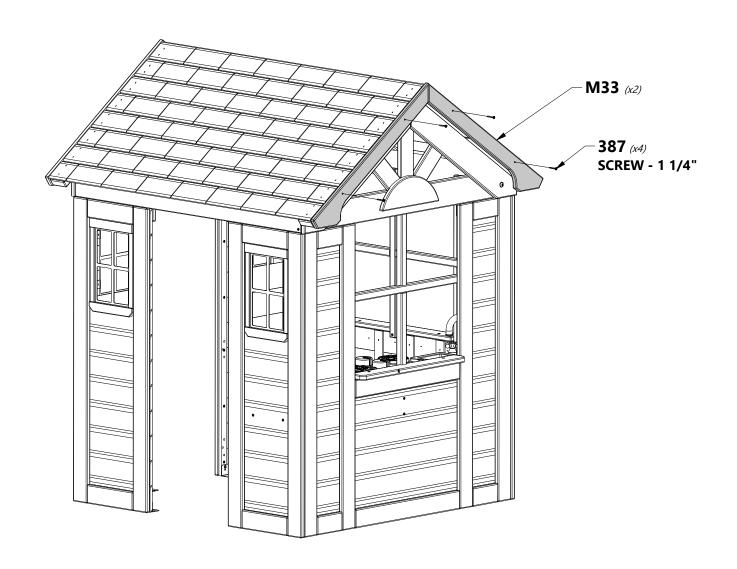



STEP 23



DP1 | DOOR PANEL - W2A03168(x1) | 1 1/8"x19 1/8"x11 3/8" (27x486x288)





 $\begin{array}{c|c} \mathsf{A6P00067} & \mathsf{KNOB} \text{-} \mathsf{BLK} & \begin{array}{c|c} \mathsf{A4M00933} \\ (x1) \end{array} \mathsf{DOOR} \ \mathsf{STOP} \end{array}$



A4M00994 HINGE (DOOR, NON-SPRING LOADED)




A4M00624 | HINGE (DOOR, SPRING LOADED)

H100395 SCREW PFH BLK 8x3/4

H100382 SCREW PFH BLK 8x1 3/4





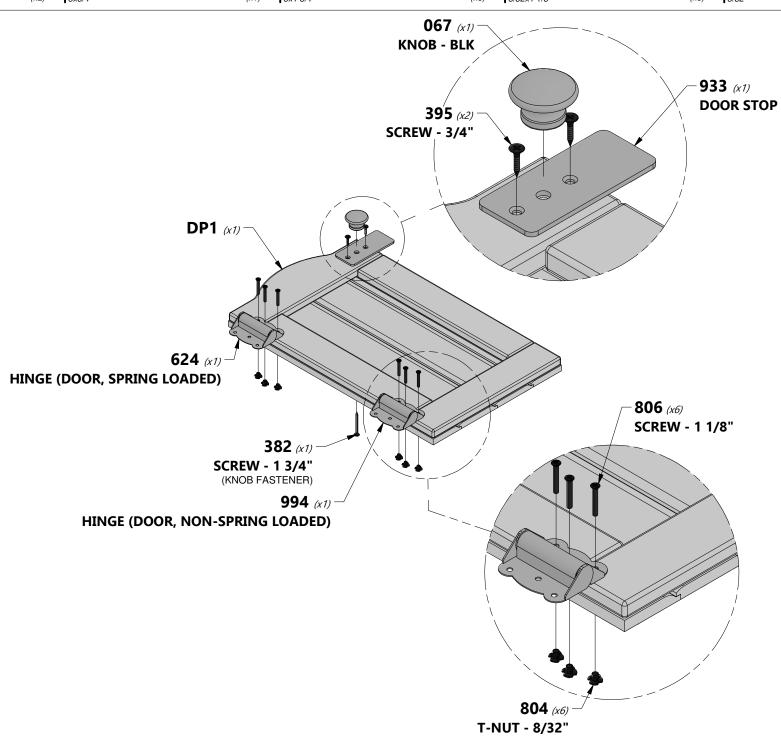












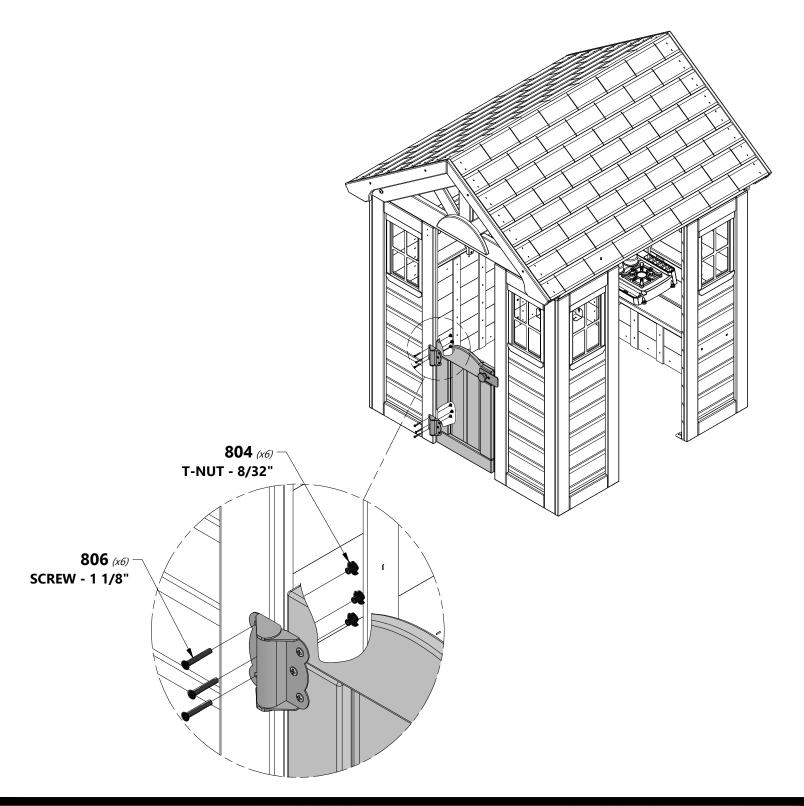








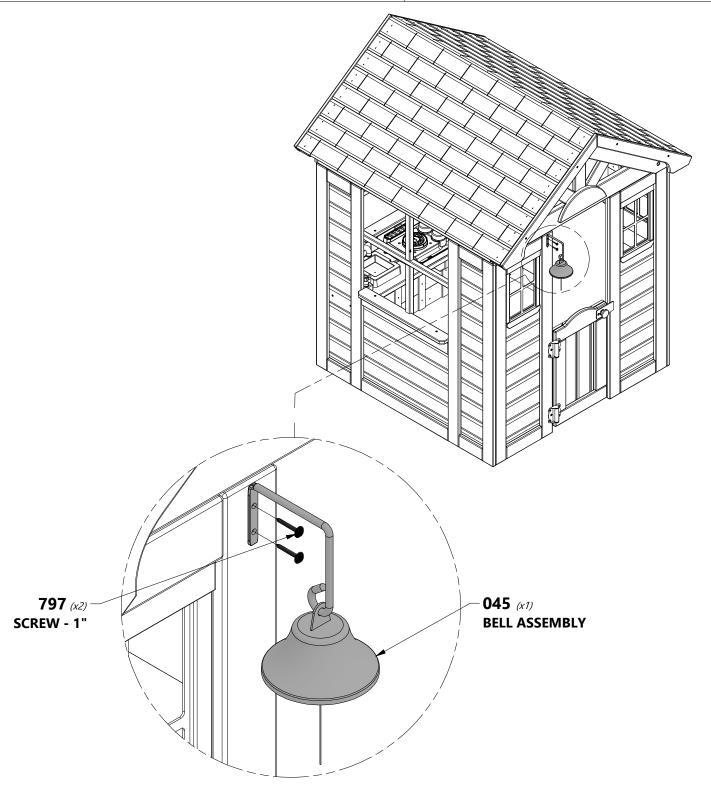




FINAL ASSEMBLY







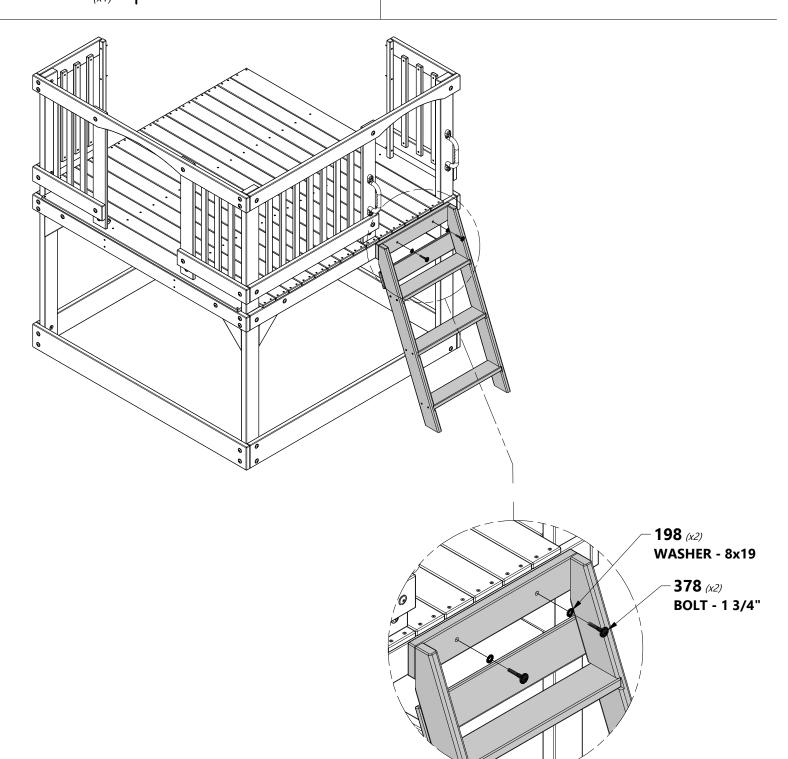











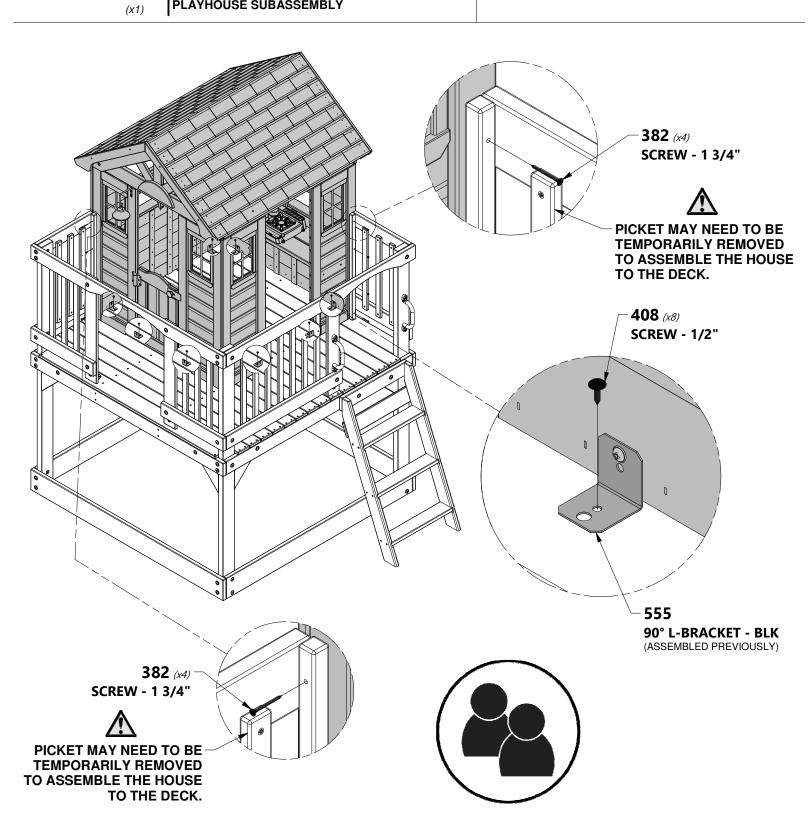









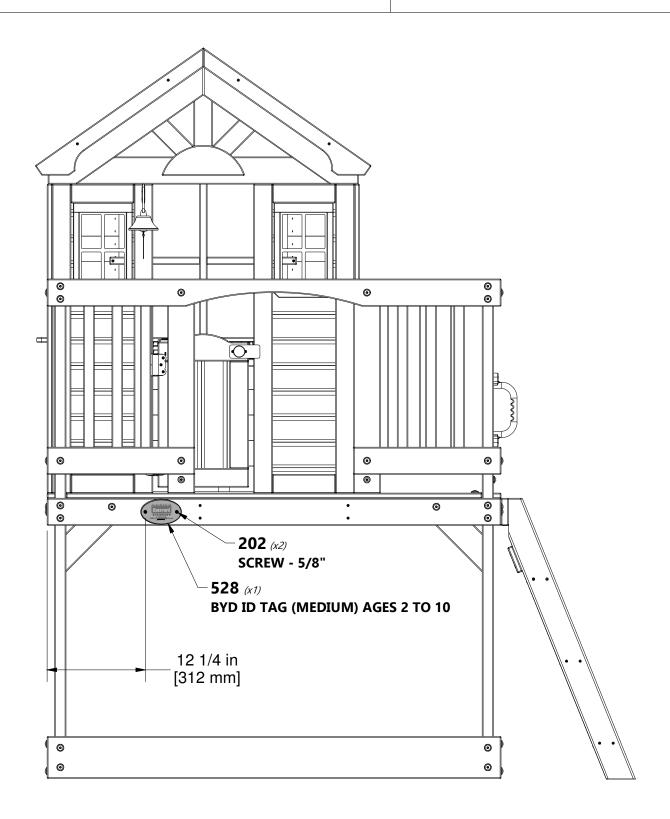






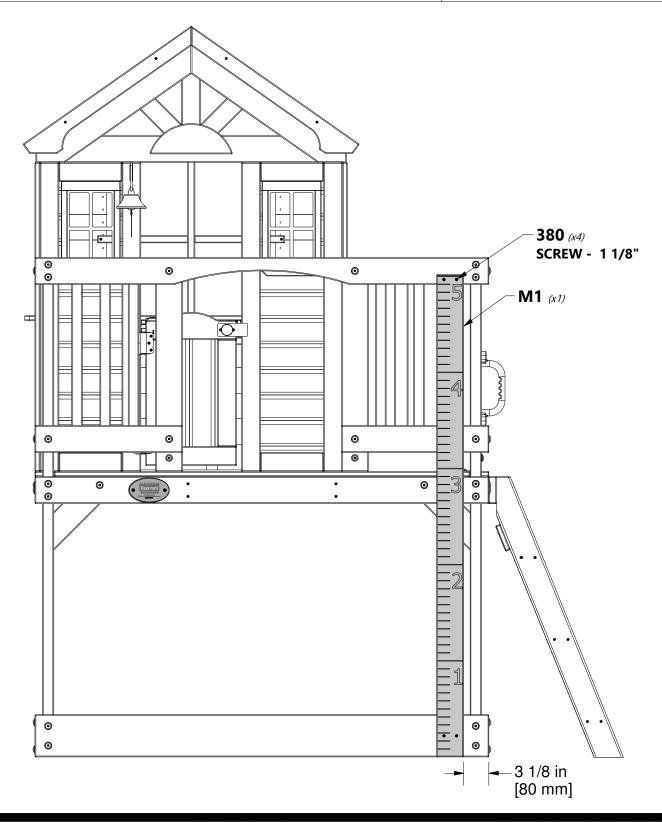




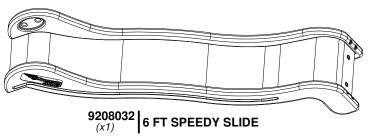






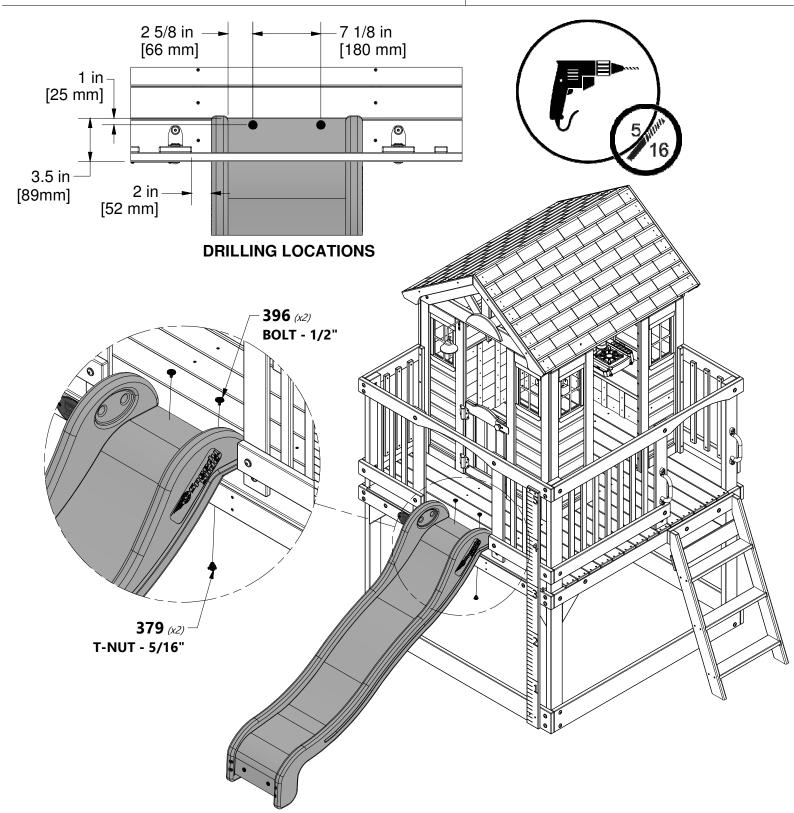

FINAL ASSEMBLY

STEP 6

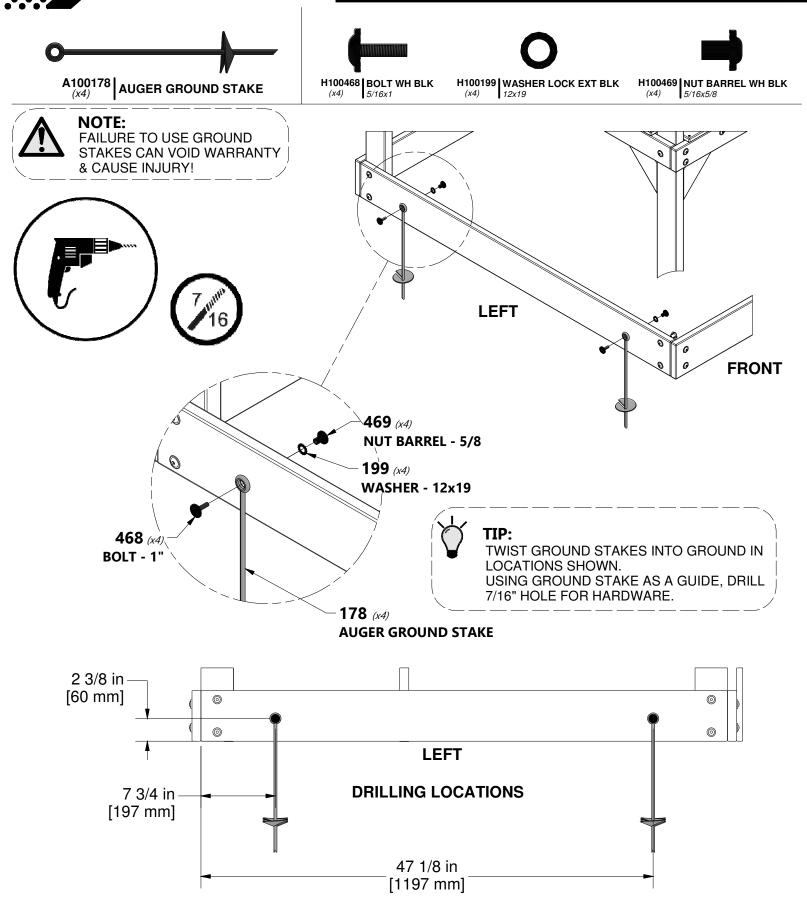

PERFORM THE SAME ASSEMBLY PROCESS FOR THE RIGHT SIDE.