

# Measuring Guide Worksheet



## 4 Things You Need to Know

### A - Curb Weight

Weight of a vehicle without passengers or extra load.

### B - Tire Spread


Distance between your tire tread.

### C - Lifting Point Spread

Maximum point from outside one lifting point to the other outside lifting point. Same for the minimum.

### D - Ground Clearance

It's important the fully lowered QuickJack has a bit of room between the rubber block and the lifting point.

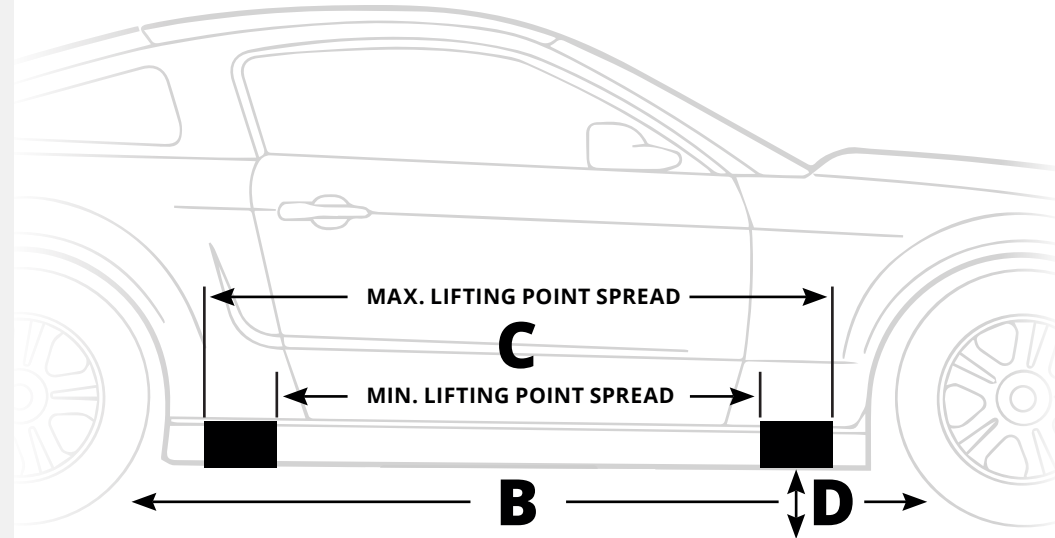

## Getting Measurements

### A - Locate the Curb Weight

You can find your vehicle's curb weight either on the driver's side door, in the manual or on the internet.

### B - Measure the Tire Spread

**Step 1** — Measure the distance between your front and rear tire treads, keeping the measuring tape 3" above the ground.

**Step 2** — Subtract 2" from the measurement in Step 1. The result is your Tire Spread Measurement (Measurement B).

### C - Measure Min. and Max. Lifting Point Spread

**Step 1** — Measure the inside of your jacking point to the inside of the opposite jack point.

**Step 2** — Measure the outside of your jacking point to the outside of the opposite jack point.

These two measurements will become your Lifting Point Spread (Measurement C).

### D - Measure Ground Clearance

Measure the distance between the ground and jacking point. This is your Ground Clearance (Measurement D).

	A Curb Weight	B Tire Spread	C Lifting Spread	D Ground Clearance
Vehicle #1	_____	_____	_____	_____
Vehicle #2	_____	_____	_____	_____
Vehicle #3	_____	_____	_____	_____
Vehicle #4	_____	_____	_____	_____

### Match vehicle measurements with requirements below

	≤ 3,500 lbs ≤ 1,588 kg	≥ 62.5 in. ≥ 1,588 mm	27 - 50.5 in. 686 - 1,283 mm	≥ 3.5 in. ≥ 89 mm
<b>3500SLX</b>				
<b>5000TL</b>	≤ 5,000 lbs ≤ 2,268 kg	≥ 70 in. ≥ 1,778 mm	37 - 60 in. 940 - 1,524 mm	≥ 3.5 in. ≥ 89 mm
<b>7000TL</b>	≤ 7,000 lbs ≤ 3,175 kg	≥ 70.75 in. ≥ 1,797 mm	37 - 60 in. 940 - 1,524 mm	≥ 3.5 in. ≥ 89 mm
<b>6000ELX</b>	≤ 6,000 lbs ≤ 2,722 kg	≥ 86.75 in. ≥ 2,203 mm	53 - 76 in. 1,346 - 1,930 mm	≥ 4 in. ≥ 102 mm
<b>5000TLX</b>	≤ 5,000 lbs ≤ 2,268 kg	≥ 76 in. ≥ 1,930 mm	43 - 66 in. 1,092 - 1,676 mm	≥ 3.5 in. ≥ 89 mm
<b>7000TLX</b>	≤ 7,000 lbs ≤ 3,175 kg	≥ 76 in. ≥ 1,930 mm	43 - 66 in. 1,092 - 1,676 mm	≥ 4 in. ≥ 102 mm

≤ less than or equal to, ≥ greater than or equal to