

Technical Data Sheet

Shower Systems

TAVISTOCK

No.	Description	Code	Fixings Included
1	Axiom Dual Function Shower System w/ Riser Kit	SAX2516	YES





Inlet Pressure	Flow Rate (l/min)
1bar	9.7
2bar	14
3bar	17
4bar	19
5bar	21

Flow from valve may vary depending on accessories and domestic supply.

Dimensions - Overview

Diagrams not to scale. All dimensions in mm (tolerance of +/-5mm)

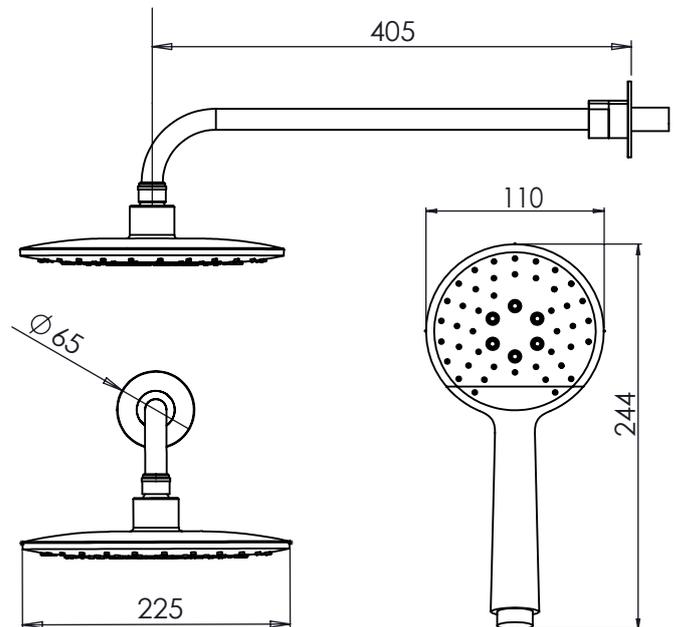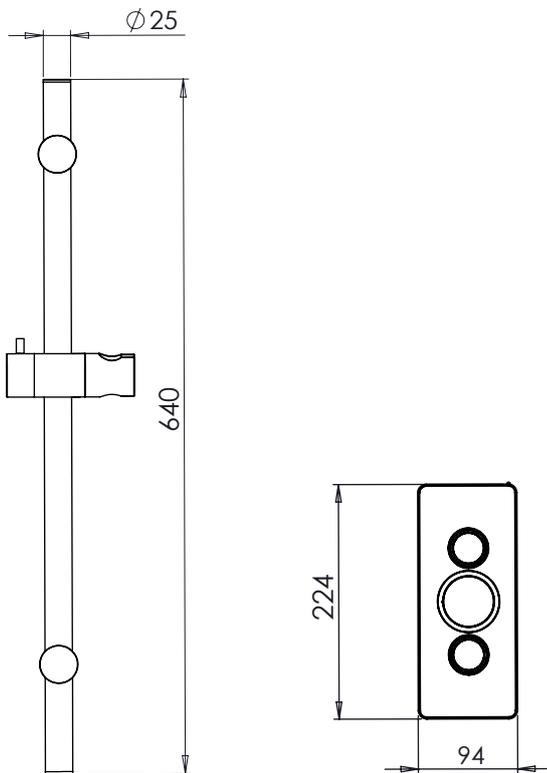

FAQs

How tall is the riser rail? Adjustable - Max Height: 640mm

How long is the shower hose? 1.5m

What is the minimum pressure for the valve? 1.0bar

What is the valve connection size? 1/2" BSP- suitable for 15mm pipework

Technical Data Sheet

Axiom Push Button Shower

TAVISTOCK


No.	Description	Code	Fixings Included
1	Axiom Dual Push Button Shower Valve	N/A	YES

Whats in the box?	Material
Cover Plate and controls	Chrome Plated Zinc
Valve	(Body) Brass
Flexible Hoses	PVC
Installation Frame	Zinc Plated Steel

Inlet Pressure	Flow Rate (l/min) Head	Flow Rate (l/min) Handset
1bar	9.7	9.5
2bar	14	13.5
3bar	17	16.5
4bar	19	18.5
5bar	21	20.5

Dimensions

Diagrams not to scale. All dimensions in mm.

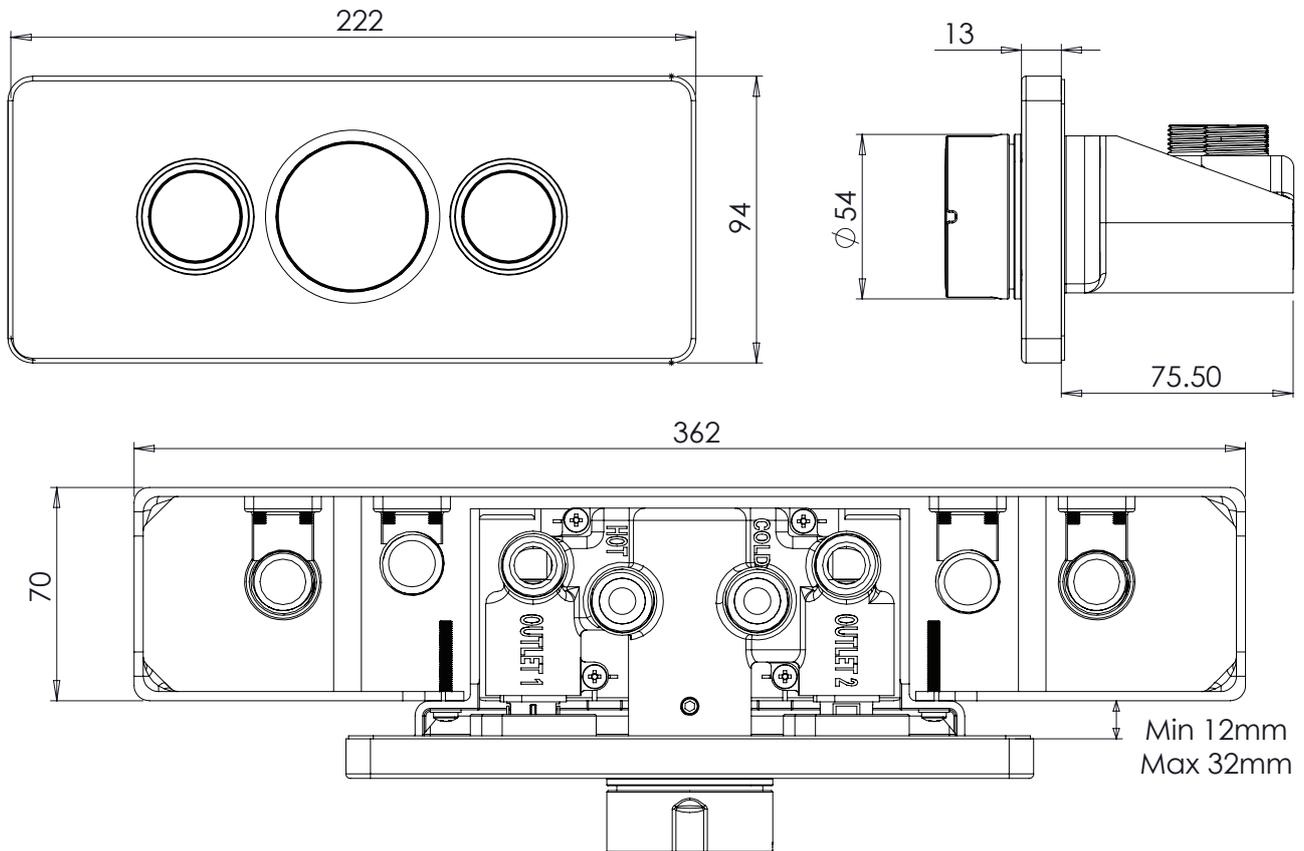

*Dimensions are subject to change, customers are advised to measure actual product before commencing installation.

FAQs

How do I control the shower water flow? Push the button

Can I have both shower options on at the same time? Yes

What size pipework do I need? 15mm

What size timber stud do I need? Minimum depth of 89mm - Installation frame is designed to fit between 400mm centre studs

Is it suitable for brick walls? It is recommended you use CLS size 89mm depth within the wall

What is the size of the connections? The valve uses 1/2" connections

Does the valve include isolation points? Yes