P334

4K PoE Dome Security Camera with Smart Detection

4K

4K UHD

Capture intricate details in superb clarity.

Smart Detection

Distinguish people, vehicles, or animals from other trivial things.

Instant Alerts

Get push notifications or emails once something suspicious is detected.

Color Night Vision

See through the night in full color with its spotlight on.

Power over Ethernet

Get both power & data with a single network cable.

Remote Access

Access your live feed anytime anywhere via Reolink App/ Client.

Weatherproof

Rated as IP67 to withstand the elements for year-round protection.

24/7 Recording

Work with Reolink NVRs to save days of your 24/7 footage.
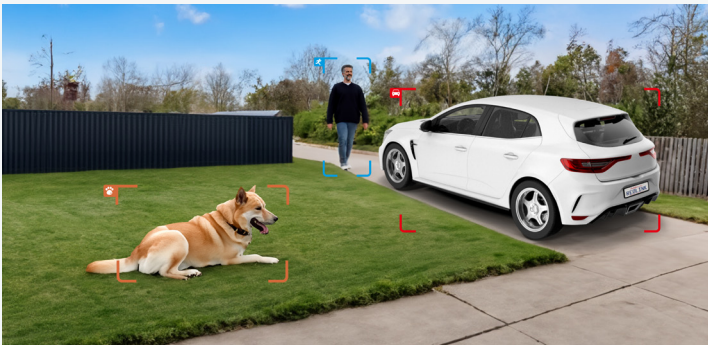
Customized Motion Zone

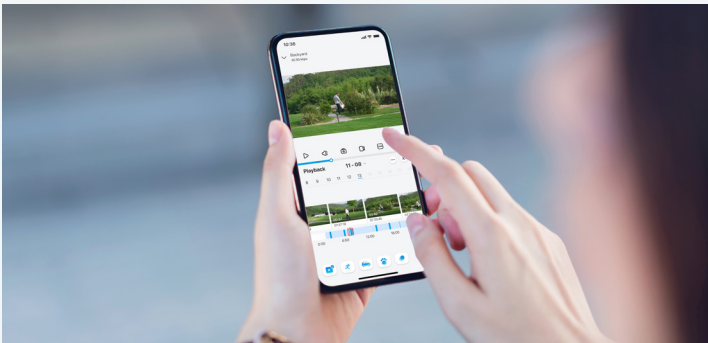Map out your detection to only get alerts about specific areas.

Stunning Clarity in 4K

The sparkling 4K camera is engineered to deliver insanely flawless videos in astounding clarity and superfine sharpness, adding an extra layer of protection with more visible details and rich colors.

Focus on True Threats

Differentiate people, vehicles, and animals from other objects and send alerts straight to your phone, so nothing important goes unnoticed.

See Through the Night in Colors

Fuzzy and pixelated night vision is now history. The powerful spotlight that keeps on all night makes the night as colorful as day.
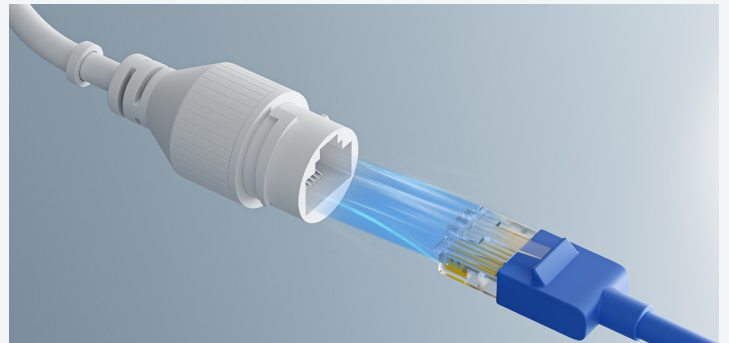

Your World at Your Fingertips

With a few clicks on Reolink App or Client, watch live feed, be informed of the emergency, replay key moments and more – from anywhere, anytime.
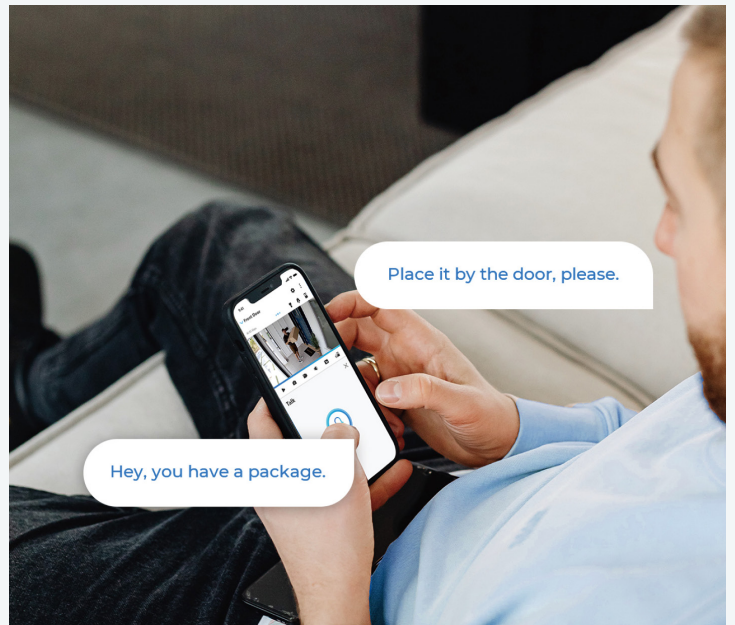

PoE, Setup in Minutes

Transmit videos and be charged simultaneously via only one network cable. Setup is easier with no messy cables.

Gallery

One App/Client for All Control

Stay connected to your home or business anytime, anywhere.

Privacy in Your Hands

We made it a priority to ensure that your privacy is protected and your data is for your eyes only.

Model	P334	
Note:	The cameras of the kit cannot work without the NVR.	
Video & Audio	Image Sensor	1/2.49" CMOS Sensor
	Video Resolution	Default: 3840X2160 (8 megapixels) @25fps
	Lens	f=4.0 mm fixed, F=2.0, with IR cut
	Video Format	H.265
	Field of View	Horizontal: 105° Vertical: 56°
	Day & Night	IR-cut filter with auto-switching
	Infrared Night Vision	30 meters (100ft) (LED: 18pcs/14mil/850nm)
	Color Night Vision	Spotlight: 1pcs
	Frame Rate	Mainstream: 2fps - 25fps (default: 25fps) Substream: 4/ 7/ 10/ 15fps (default: 10fps)
	Code Rate	Mainstream: 4096Kbps - 8192Kbps (default: 6144Kbps) Substream: 64Kbps - 512Kbps (default: 256Kbps)
	Audio	Audio recording
Detection/Recording Modes	Smart Alarms	Person detection/vehicle detection/animal detection
	Recording Modes	Motion-triggered recording (default); scheduled recording, 24/7 recording
Power	PoE	IEEE 802.3af, 48V Active
	DC Power	DC 12.0V 1A, <12W
Interface	Power	DC power port
	System	Reset button
	Ethernet	One 10M/100Mbps RJ45
	Audio	Built-in microphone
Working Environment	Temperature	Operating temperature: -10°C~+55°C (14°F~131°F)
	Humidity	Operating humidity: 10% ~ 90%
	Waterproof	IP67
Size & Weight	Dimension	117.4 x 103.8mm
	Weight	526g
Warranty	Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/.

1	Mount	2	Metal Aluminum Case	3	Spotlight
4	IR LEDs	5	High Definition Lens	6	Daylight Sensor

1	Power	2	Reset Button	3	Network
4	Waterproof Lid				

Best Companion

PoE Injector

Reolink NVR

Ethernet Cable

Waterproof Lid

Junction Box D20

Download Free Reolink App & Client

Learn more: https://reolink.com/software-and-manual/

Terms and Privacy

Terms and Privacy: Use of the product is subject to your agreement to the Terms of Service and Privacy Policy at reolink.com. Keep out of reach of children.

Limited Warranty

Limited Warranty: This product comes with a 2-year limited warranty. Learn more: https://reolink.com/warranty-and-return/