

0 601 9F6 070 – GSR 12V-15 FC

Material number	0 601 9F6 070
EAN	3165140847728
1/2 L-BOXX inlay 12 V adapters 1 600 A01 1UW	✓
1/2 L-BOXX inlay for tool and charger 1 600 A00 2UV	✓
2 x battery GBA 12V 2.0Ah 1 600 Z00 02X	✓
Bit holder attachment GFA 12-X 1 600 A00 F5J	✓
Drill chuck attachment GFA 12-B 1 600 A00 F5H	✓
Excenter attachment GFA 12-E 1 600 A00 F5L	✓
L-BOXX 102 1 600 A01 2FZ	✓
Quick charger GAL 12V-40 Professional 1 600 A01 9R4	✓
Right angle attachment GFA 12-W 1 600 A00 F5K	✓



Technical data

Description

Trades	Electrician Joiners and carpenters Plumbing, heating and air conditioning technology
Cordless/Corded	Cordless
Tool dimensions (width)	29 mm
Tool dimensions (length)	132 mm
Tool dimensions (height)	178 mm
Packaging dimensions (width x length x height)	360 x 446 x 119 mm
Drill chuck, version	10-mm keyless chuck
Battery capacity	2,0 Ah
Noise level	The A-rated noise level of the power tool is typically as follows: Sound pressure level 79 dB(A); Sound power level 79 dB(A). Uncertainty K= 3 dB.
Brand Line	RBH - PRO HEAVY DUTY

Technical data


Torque (soft/hard/max.)	15/30/- Nm
No-load speed (1st gear / 2nd gear)	0 – 400 / 0 – 1,300 rpm
Battery type	Lithium-Ion
Chuck capacity, min./max.	1 / 10 mm
Battery voltage	12.0 V
Weight excl. battery	0.6 kg
Torque settings	20+1

Drilling diameter

Max. drilling diameter in wood	19 mm
--------------------------------	-------

Screw diameter

Max. screw diameter	7 mm
---------------------	------

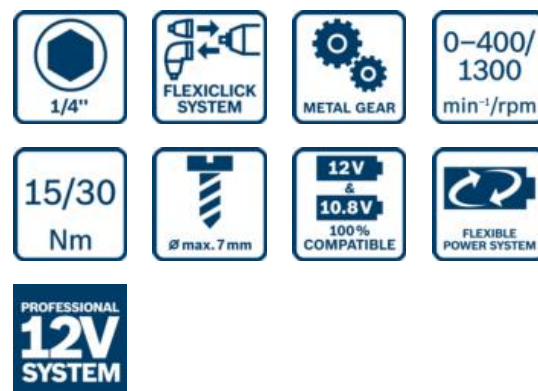

Sales information

Positioning

- Redefine your limits – the flexibility of five solutions in one compact tool

User benefit

- Versatile: Choice of five options – drill driver with a magnetic bit holder, lockable bit holder, drill chuck, angle adapter and offset angle adapter
- Compact: Perfect for hard-to-reach places – due to extremely compact design
- Performing: Convincing power – thanks to 30 Nm of torque