

## Series 4, Built-in fridge, 177.2 x 54.1 cm, flat hinge KIR81VFE0G



### Included accessories

1 x Heavy-duty hinge support

### Optional accessories

KSZGGM00 :

- **MultiBox XXL:** extra-large drawer for your fruit and vegetables.
- **Quiet appliances:** enjoy a calm and relaxing home.
- **LED lighting:** all your items in perfect view.
- **Super Cool function:** cools new food faster, to protect what is already inside.
- **Intelligent Inverter Technology:** ensuring stable temperature control and efficient performance.

### Technical Data

Gross weight: 127.000 lbs  
 Energy Efficiency Class: E  
 Average annual energy consumption in kilowatt hour per year (kWh/a): 114 kWh/a  
 Sum of volume of frozen compartments: 0 l  
 Sum of volume of chill compartments: 310 l  
 Airborne acoustical noise emissions : 35 dB(A) re 1pW  
 Airborne acoustical noise emission class: B  
 Built-in / Free-standing: Built-in  
 Number of compressors: 1  
 Number of independent cooling systems: 1  
 Width of the appliance: 541 mm  
 Height: 1772 mm  
 Depth: 548 mm  
 Net weight: 53.0 kg  
 Required niche size for installation (HxWxD): 1775 x 560 x 550 mm  
 Door panel options: Not possible  
 Door hinge: Right reversible  
 Number of Adjustable Shelves in fridge compartment: 5  
 Shelves for Bottles: Yes  
 Frost free system: Not applicable  
 Interior ventilator: Yes  
 Reversible Door Hinge: Yes  
 Length electrical supply cord: 230.0 cm  
 Multi-Flow Air Tower: No  
 Economy setting: No  
 Cold technology: 1 compressor/1 cold circuit  
 Fast cooling switch: Yes  
 Temperature Controlled Drawer: No  
 Humidity Control Drawer: No  
 Number of Door Bins - Refrigerator: 5  
 Door bin adjustability - Refrigerator: Yes  
 Tilt-out door bins in fridge: Yes  
 Gallon Storage: Yes  
 Number of Gallon storage: 2  
 Motorized Shelf: No  
 Material of the shelves: Glass  
 Door opened indicator freezer: No  
 Fuse protection: 10 A  
 Voltage: 220-240 V  
 Frequency: 50 Hz  
 Door panel options: Not possible  
 Installation typology: Full-integrated  
 Energy Star Qualified: No  
 Plug type: GB plug  
 Required cutout/niche size for installation (in): x  
 Dimensions of the packed product: 72.44 x 24.01 x 25.19  
 Net weight: 117.000 lbs



4 242005 365272

## **Series 4, Built-in fridge, 177.2 x 54.1 cm, flat hinge KIR81VFE0G**

---

### **Performance and Consumption**

- EU19\_EEK\_D: E
- Total Volume : 310 l
- Annual Energy Consumption: 114 kWh/a
- Climate Class: SN-ST
- Noise Level : 35 dB , EU19\_Noise emission class\_D: B

### **Functions**

- Bright interior LED fridge light

### **Design features**

- LED electronic control
- Optical and accoustical
- Super Cooling: automatic deactivation
- Automatic defrost fridge
- Easy clean interior

### **Design features**

- Net Fridge Volume : 310 l
- 7 safety glass shelves in fridge compartment of which 5 are height adjustable
- 5 door bins
- Metal bottle rack

### **Freshness System**

- 2 MultiBox drawers

### **Key features - Fridge section**

- Right hinged door, door reversible
- Fully integrated
- Ventilation through plinth
- Length of power cord: 230 cm
- 220 - 240 V

### **Dimension and installation**

- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D
- Dimensions: 177.2 cm H x 54.1 cm W x 54.8 cm D

### **Key features - Freezer section**

- KIR81VFE0G





### **Country Specific Options**

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.


### **Additional features**

## Series 4, Built-in fridge, 177.2 x 54.1 cm, flat hinge KIR81VFE0G

Measurements in mm

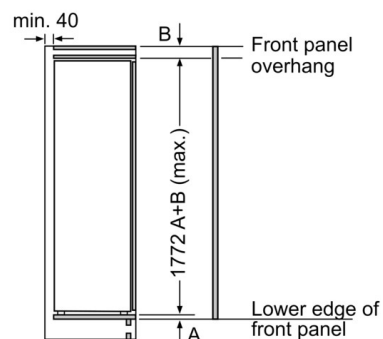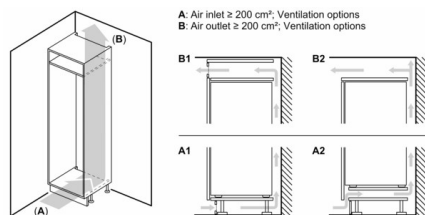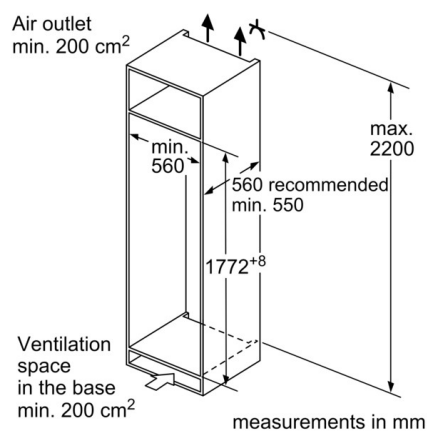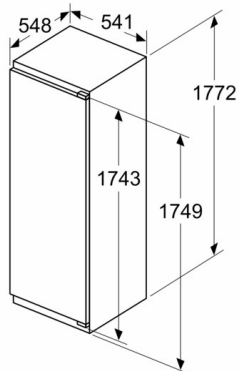


measurements in mm  
Recommended gap dimensions for flat hinges



	F	R	X
16-19	0-3	2.5	
20	0-1	3	
	2-3	2.5	
21	0-1	3	
	2-3	2.5	
22	0	4	
	1	3.5	
	2-3	3	

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

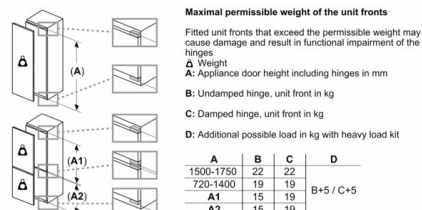

A	B	C	D
1500-1750	22	22	
720-1400	19	19	
A1	15	19	B+5 / C+5
A2	15	19	