


PRODUCT FICHE

Hisense

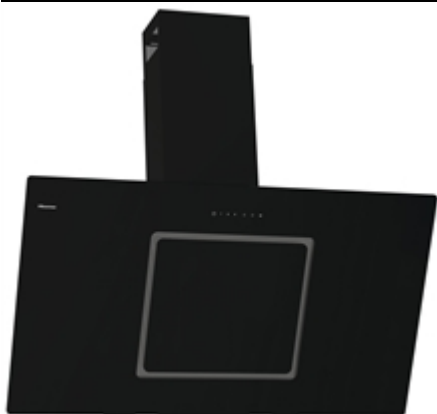

-klas=7801
745127
CH10IN14BBUK

USP :

Perimetric suction	Yes
Motor type	Capacitor motor
Number of speed positions	3
Number of lights	2
Lamp type	LED
Illumination setting	On/off light switch
Number of filters	1
Number of charcoal filters	2
Filter material	Aluminium
Washable grease filter	Yes
Grease filter indicator	Yes
Odour filter	Optional
Air flow by extraction version, step 1	378 m³/h
Air flow by extraction version, step 2	458 m³/h
Maximum extraction rate by extraction operation	617 m³/h
Max. noise level	68 dB(A)re 1 pW



Basic information :

Product group	-klas=7801
Decor panel options	N/A
Construction type	Free-standing
Basic color of product	N/A
Main colour of product	Black
Brand	N/A
Commercial code	CH10IN14BBUK
Internal article number	745127
EAN code	3838782906633
Color body	Black
Material body	Painted steel
Material chimney	Painted steel
Typology	Integrated
Installation type	Wall freestanding
Motor location	Motor integrated in the hood
Operating mode	Convertible
Connection Rating	0 W
Current	0,0 A
Voltage	220-240 V
Frequenc	50 Hz
Approval certificates	N/A
Length of electrical supply cord	1100 cm
Plug type	GB
Height of the chimney (mm)	400/710
Height of product, without chimney	507 mm
Net weight	16,7 Kg
Gross weight	20,0 Kg
Width of the product	1000 mm
Height of the product	507 mm
Depth of the product	386 mm
Width of the packed product	1060 mm
Height of the packed product	558 mm
Depth of the packed product	435 mm
Air exhaust	Yes

Features :

Remote control	N/A
Short description of the product	CV100BK/E-N2T5L-CH10IN14BBUK - RL_HI4
Capability of wireless communication	N/A
Type of control	Mechanical
Type of manual control devices	Touch control

Number of motors	1
Total power of the motors	210 W
Number of speed settings	3
Boost position	No
Maximum output air extraction	617 m³/h
Illumination setting	ON/OFF
Number of lights	2
Type of lamps used	LED diode
Total power of the lamps	3 W
Max. noise level	68 dB(A) re 1 pW
Diameter of air outlet	150
No-return airflow flap	Yes
Grease filter material	Washable aluminium
Odour filter	No

Energy label information / Performance :

Air flow at intensive or boost setting	0
Maximum Air flow	617 m³/h
Minimum air flow	378 m³/h
Total annual energy consumption	49,0 kWh/year
Energy efficiency class	A
Fluid Dynamic Efficiency class	A
Grease filtering efficiency class	E
Lighting efficiency	A
Noise level with boost position	0 dB
Sound power at max. speed	68 dB
Sound power at min. speed	0 dB
Maximum extraction rate by extraction operation	617 m³/h
Energy efficiency index (2010/30/EC)	54,4 %
Fluid Dynamic Efficiency (2010/30/EC)	28,9
Grease filtering efficiency (2010/30/EC)	64,1 %
Lighting efficiency (2010/30/EC)	57,7
Noise level with boost position	0 dB(A) re 1 pW
Power consumption in standby mode (2010/30/EC)	0,29 Watt
Power consumption in off-mode - NEW (2010/30/EC)	0,0
ECO label	N/A
Application of EU Energy Label Regulation	N/A
Energy Smart appliance, able to optimise consumption pattern (2017/1369/EU)	N/A

